



WN 055374, 08/19

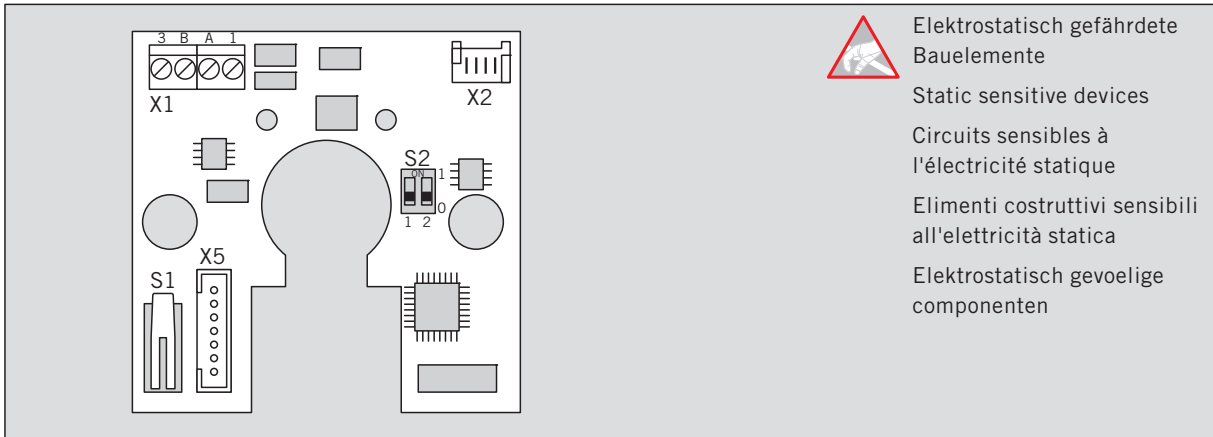

Elektrostatisch gefährdete Bauelemente
 Static sensitive devices
 Circuits sensibles à l'électricité statique
 Elementi costruttivi sensibili all'elettricità statica
 Elektrostatisch gevoelige componenten

Beschaltung ST 3x DCW®

DE

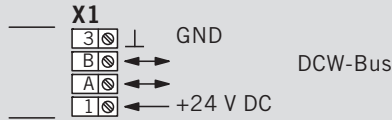

Beschreibung ST 3x DCW®

- X1** Verbindung zu externen DCW-Geräten.
- X2** Verbindung zum internen Schlüsseltaster.
- X5** Verbindung zur Firmware-Programmierung.
- S1** Sabotage-Gehäuse-Kontakt.
- S2** Mikro-Schalter zur Einstellung der Komponentenadressen:

Schalter		Adresse
1	2	
0	0	1
1	0	2
0	1	3
1	1	4

Technische Daten:

Versorgungsspannung: 24 V DC, +/- 10% stabilisiert
 Stromaufnahme: ca. 50 mA

Terminal connections ST 3x DCW®

EN



Description ST 3x DCW®

- X1** Connection to external DCW-Devices.
- X2** Connection to internal key switch.
- X5** Connection to firmware programming.
- S1** Anti-tamper housing contact.
- S2** Micro-Switch to Adjustment of komponent addresses:

Switch		Address
1	2	
0	0	1
1	0	2
0	1	3
1	1	4

Technical data:

Power supply: 24 v DC, +/- 10% stabilised
 Current input: approx. 50 mA

Änderungen vorbehalten
 Subject to change without notice