


RCI P-500-H-A


125kHz standard security reader

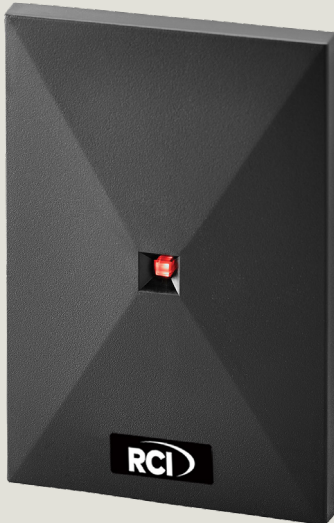

P-500-H-A

RCI P-500-H-A proximity reader

RCI Pyramid sets the electronic security benchmark for 125-kHz proximity readers, cards, and tags. Based upon proven contactless digital radio frequency identification (RFID) technology, Pyramid readers interface with a wide range of electronic access control systems by complying with either the legacy Wiegand or the latest bi-directional Open Supervised Device Protocol (OSDP). They offer value-add features such as MAXSecure™ and fleaPower™, and can be ordered to support several proximity card and tag technologies. Additionally, Pyramid cards and tags are passive devices, eliminate maintenance by requiring no battery, and can be ordered to support several proximity reader technologies.

 MAXSecure™ Unique Security Feature	 fleaPower™ Energy-Conservation Technology	 Pro-X™ Read-Range Boosting Technology	 ETL Listed Independently Tested and Certified (Wiegand models) Conform to UL Standard 294 and ULC 60839-11-1
 Warranty Limited Lifetime Warranty	 Wiegand or OSDP Output Interface	 U.S. Single-Gang Wall-Box Mount Metal or Plastic Box & Flat Surfaces	 Frequency: 125 kHz Read Range: Up to 8 inches (202 mm)

Specifications

P-500-H-A

Technology	Proximity
Frequency	125 kHz
Mounting	Metal or plastic US single-gang wall box, as well as flat surfaces
Dimensions	3" W x 4.6" H x 0.4" D (76 mm x 117 mm x 10 mm)
Weight	4 oz (113 g)
Certifications	FCC, ICC, CE, C-Tick, UL Standard 294, ULC 60839-11-1
IP Code	IP67
Voltage	+5 to 16 VDC
Current Draw	35 mA typical, 75 mA peak @ 12 VDC
Read Range	Up to 8 inches (202 mm)
Cabling	24 AWG minimum, multiconductor stranded with an overall foil shield
Interface	Wiegand (26-bit and custom formats) or OSDP
Operating Temperature	-31° F to 150° F (-35° C to +66° C)
Operating Humidity	0% to 90% relative humidity
Color Options	Black and a white snap-on cover included standard
Audio Tone	Beeper included standard
Indoor & Outdoor Installation	Electronics sealed in weather- and tamper-resistant epoxy potting
Warranty	Limited lifetime warranty
LED	Four-state standard (red, green, amber, and off)
Technologies Supported	P-500-H-A: Pyramid + certain HID 125-kHz Proximity protocols + certain AWID 125-kHz Proximity protocols

NOTES:

Carrying the ETL Label and tested by Intertek, conforms to UL Standard 294 and ULC Standard 60839-11-1. Wiegand models have been evaluated. IP67 Independently tested and verified by Intertek. Linear power supplies are recommended for best operation. Read range utilizing PSC-1 Standard Light Proximity Card with 12 VDC at the reader. Range can be affected by installation scenario. Cabling: Belden 9535 or Belden 9539 or similar, for all reader functions. Shielded, twisted pair (Belden 8723 or similar) for OSDP.

© 2022 dormakaba Inc. All rights reserved. Pyramid, Ranger & Conekt Series Proximity® are the registered U.S. trademarks of Farpointe Data, Inc. All other trademarks are the property of their respective owners.



dormakaba USA Inc.
6161 E. 75th St.
Indianapolis, IN 46250
800.523.8483
www.dormakaba.us

dormakaba Canada Inc.
7301 Decarie Blvd.,
Montreal QC H4P 2G7
888 539-7226

KAA1561 08-22