



ED900

—
Low Energy Operator



DORMA ED900 LOW ENERGY OPERATOR

DORMA's innovative, whisper quiet low energy operator with electromechanical drive and advanced power assist



Innovative Technology

Employing an innovative electromechanical drive and a state-of-the-art microprocessor motion control system, the new ED900 is DORMA's most advanced low-energy swing door power operator. The operator is exceptionally quiet, safe, and easy to use.

When operated manually, the ED900 demands little physical effort. Advanced power assist through the entire opening cycle makes even the heaviest-rated door feel light.

Fully ADA Compliant

The new operator is especially helpful for children, the elderly, persons with disabilities, or those carrying objects or pushing carts. This fully ADA-compliant device opens doors at precisely controlled speeds and forces, assuring safety for all users.

Advanced Features

The ED900 also includes a blow-open feature for smoke ventilation (per NFPA code 92B), permanent hold-open, and an onboard power supply delivering 1.5 amps @ 24-volt DC, which eliminates the need for a secondary power supply. It includes twelve programmable options to accommodate even the most challenging door installations.

In addition, the ED900 boasts the smallest footprint in the industry—up to 65 percent smaller than some other manufacturers' operators.



ED900 Features

- **Advanced Power Assist** through entire opening cycle (from 0° to 85°). When opened manually, even the heaviest rated door feels light—about 5 lb.
- **Blow Open** for integration into smoke ventilation systems per NFPA 92B.
- **Permanent Hold Open** triggered two ways: (1) by onboard toggle switch or (2) by input from a remote source.
- **Onboard Power Supply** delivers an unprecedented 1.5 amps @ 24 VDC:
 - 3x more power than the competition.
 - No need for separate power supply.
 - Powers most EAC devices, including electromagnetic locks, electric strikes, RF transmitters/receivers, illuminated push buttons, wall switches, presence detectors, motion sensors, and key pads.
- **Obstacle Detection**—The door closes if an obstacle is detected during the opening cycle and reopens if an obstacle is detected during the closing cycle.
- **Push & Go** triggered by manually opening the door 4° from the closed position.
- **Motion and Presence Sensors** can be installed on both the push and pull side of the opening.
- **Closing Speed and Latching Force** under power failure conditions are field adjustable as part of installation set-up and commissioning.
- **Positive Mechanical Stops** with both Pull Side track mount and Push Side arms are included. In the event of power failure conditions, the stops prevent the door from opening past 90° or a pre-determined opening angle.
- **Vestibule Function Synchronizing Options**
- **Synchronized (Master/Slave) Integration for Pair of Doors** monitors both doors to open and close at the same rate.
- **Pull Side or Push Side Applications**
- **Full Complement of Painted and Architectural Finishes**—custom and designer.
- **Self-diagnosing Status Indicator**—LED display error code messages.

ED900 Programmable Options

- **Back Check and Latching Angles**
- **Opening Cycle Hold Open Time:**
 - From 0 to 30 seconds.
- **After Hours Access (night bank) Hold Open Time:**
 - From 0 to 30 seconds.
- **Day/Night (Push-Pull):**
 - Unlocking during business hours.
- **Delayed Unlocking:**
 - From 0 to 400 milliseconds.
 - Use with electromechanical access control peripherals such as electric strikes or exit devices with electric latch retraction.
- **Closing Force Prior to Unlocking:**
 - Works with the Delayed Unlocking feature and accommodates reduction of latch bolt locking force prior to releasing the electromechanical access control device.
- **Latching Action Force:**
 - Power boost during latching cycle to overcome resistance for door seals, locking devices, or door/frame misalignment.
- **Latching Action Angle** for engaging the programmable latching action feature:
 - Opening angle range: 2° to 5°
- **Keep Closed Force:**
 - Designed to keep the door in the closed position when unlocked.
- **Wind Load Control:**
 - Opening and closing cycles.
 - Variables: Door size and weight, hinging, alignment, wind loads, HVAC imbalance.
 - Forces measured at the door must conform with ANSI 156.19 to maintain ADA compliance.
- **Door Position Status:**
 - Monitors when door has reached fully open or fully closed.
 - Can communicate status to external monitoring device or console.
- **Synchronized Pair of Doors (master/slave) integration:**
 - Opening and closing at the same rate of speed.
 - Opening of the second leaf can be delayed by up to 30° of when the first leaf is opened.






ED900 Low Energy Operator Technical Specifications

- Power Requirements
 - 115 Vac +/-10%,
50/60 Hz, 6.6A max
 - Branch Circuit
Protection: 15A min
- Onboard Power Supply for
Access Control Devices
 - 1.5A @ 24 VDC
- Max Door Size
 - 48" (1219 mm) wide
220 lb (100 kg)
- Operator Weight
 - 26.5 lb (12 kg)
- Operating Temperatures
 - 5° F to 122° F (-15° C to 50° C)
- Standard Operator Dimensions
 - 27" W x 2-3/4" H x 5-1/8" D
(685 mm x 70 mm x 130 mm)
- Max Opening Angle
 - Powered: 110°
 - Manual: 180°
- Non-handed
- On-board cycle counter



Certifications, Listings & Approvals

- Americans for Disabilities Act (ADA)
- ICC/ANSI A117.1 Accessible and Useable
Buildings and Facilities
- Underwriters Laboratories—ANSI/UL 325
Door, Drapery, Gate, Louver, and Window
Operators and Systems
- ANSI/BHMA 156.19 Power Assist and Low
Energy Power Operated Doors (Pending)
- UL 10C Fire Listing (Pending)
- California State Fire Marshal (Pending)
- Onboard Power Supply—ANSI/UL 294
Access Control System Units (Pending)

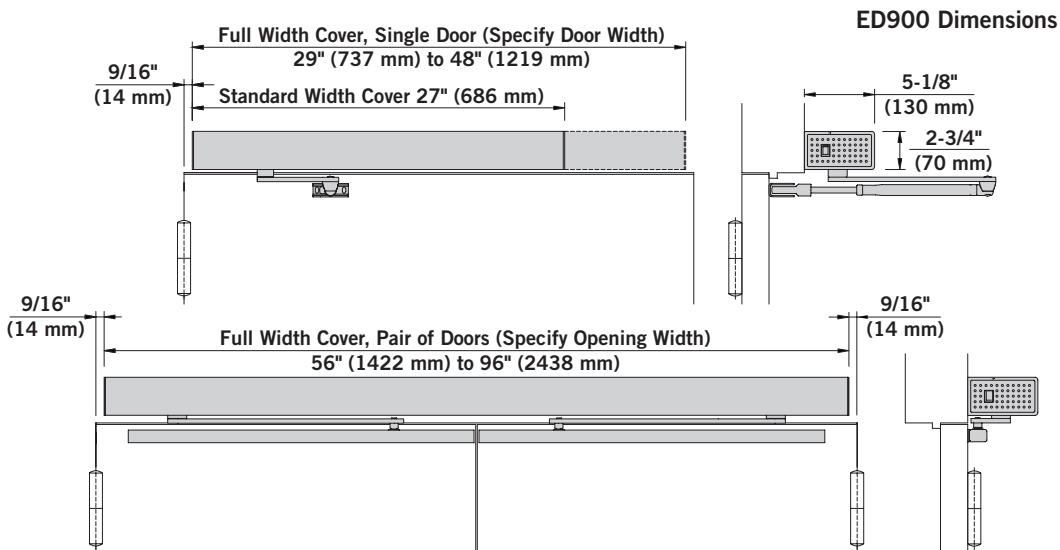

DORMA Americas
Dorma Drive, Drawer AC
Reamstown, PA
800-523-8483
www.dorma.com