

Circuits sensibles à l'électricité statique






Static sensitive devices



Raccordement du verrouillage EM

Sélection tension

12 V DC 24 V DC
(réglage usine)

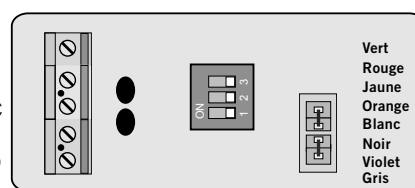

LED + (non fournie)

F

Temporisation de verrouillage

Temporisation avant verrouillage lorsque la porte est en place
Réglable entre 0 et 6 secondes, par le mini commutateur



| | | | | | | | |
|-------------|-------|---|---|---|-----|-----|-------|
| Sur "ON" | Aucun | 1 | 2 | 3 | 1&3 | 2&3 | 1&2&3 |
| Durée (Sec) | 0 | 1 | 2 | 3 | 4 | 5 | 6 |

LED (non fournie)

LED éteinte: Pas d'alimentation
LED allumée: Verrouillée
LED clignotante: Porte en place mais non verrouillée





Caractéristiques techniques

Alimentation: 12 V DC / 24 V DC
Consommation Max: 1,2 A / 0,6 A 2 secondes
Consom. Continu: 200 mA / 100 mA
Protection: Par VARISTOR intégrés
Contact: Max 24 V DC et 1 A

Electromagnet connections

Voltage selection

12 V DC 24 V DC
(factory setting)

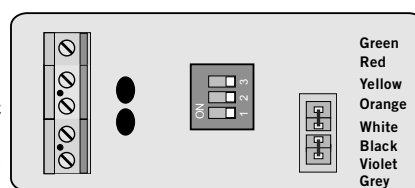

LED + (no provided)

GB

Delay time adjustment

Temporisation before locking when the door is closed
Adjustment between 0 et 6 secondes, using mini-dip



| | | | | | | | |
|-------------|------|---|---|---|-----|-----|-------|
| Dip "ON" | None | 1 | 2 | 3 | 1&3 | 2&3 | 1&2&3 |
| Delay (Sec) | 0 | 1 | 2 | 3 | 4 | 5 | 6 |

LED (no provided)

LED off: No power supply
LED on: Locked
LED blinking: Door closed but not locked

Technical data

Power supply: 12 V DC / 24 V DC
Current input Rush: 1,2 A / 0,6 A for 2 second
Current input Normal: 200 mA / 100 mA
Protection: By integrated VARISTOR
Contact: Max 24 V DC and 1 A