

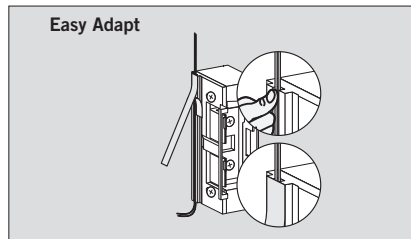
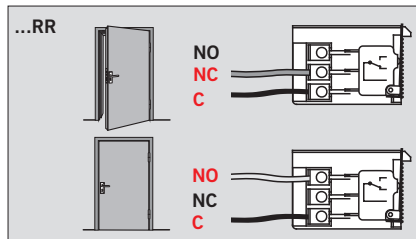
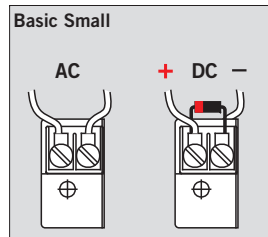


# TÜRÖFFNER / ELECTRIC STRIKE

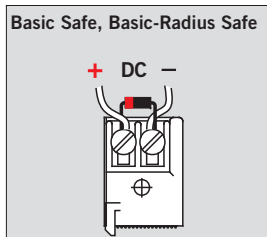

Basic, Smoke, Fire

WN 058351 45532, 09/12

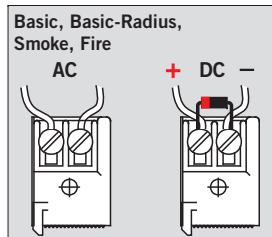

<b>CE</b>	DORMA GmbH + Co. KG		12	
	DORMA Platz 1			
	58 256 Eintrapektal/Germany			
	0432-OPD-0173	Smoke	2	S I 8 A 0 L 2 I* 3
EN 14846:2008	Fire	2	S I 8 E 0 L 2 I* 3	
Dangerous substances: None				*RR-Contact


# TÜRÖFFNER / ELECTRIC STRIKE




Lucky Basic, Lucky Smoke, Lucky Fire

12V DC I=240 mA (max. 400 mA)  
 24V DC I=160 mA (max. 400 mA)  
 Einschaltdauer(ED)/Duty factor (DF): 100%  
 Einbaulage/fitting position: universal  
 Kontaktbelastbarkeit/Contact rating: 48V/1A

12/24V DC




12/24V AC




Gleichrichter-Modul/  
 Rectifier module  
 (Option)  
 Art.-Nr. 15199001  
 sw = schwarz/black  
 bl = blau/blue  
 rt = rot/red

12/24V AC/DC


Gleichrichter-Modul/  
 Rectifier module



Easy Adapt



...RR

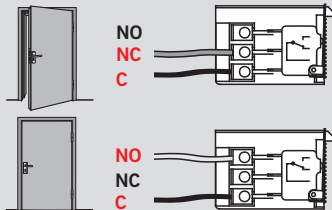

Änderungen vorbehalten  
 Subject to change without notice

DORMA GmbH + Co. KG		12	
DORMA Platz 1			
58 256 Ennepetal/Germany			
0432-0P0-0173	Smoke	2	S 18 A 0 L 2 1* 3
EN 14846:2008	Fire	2	S 18 E 0 L 2 1* 3
Dangerous substances: None		*RR-Contact	