


E-Plex® 5886 Series

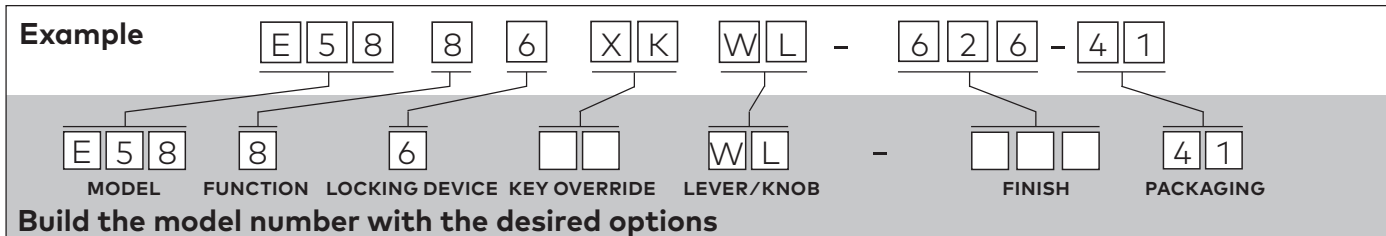

Base Model	Description	Base Price
E5886XKWL62641	E5886, Entry/Egress (Back-to-Back), 3,000 Users, 30,000 Audit Events (FIPS 201.1 Lock)	\$2454.00

Choose One Option from Each Category

Function	Description	Price
8	American Steel Mortise (ASM), Entry/Egress	No Charge
Locking Device	Description	Price
6	Mortise 1¼" (32 mm) face plate no deadbolt (non-handed)	No Charge
Key Override Options**	Description	Price
XK	K-I-L Kaba Cylinder (Kaba 90 Keyway) included	No Charge
XS	K-I-L Kaba Cylinder (Schlage "C" Keyway) included	No Charge
B	SFIC Best and Equivalent (6 or 7-pin length)	No Charge
C	LFIC Corbin Russwin (6 or 7-pin length)	No Charge
M	LFIC Medeco/ASSA/Yale/Abloy (5-or 6-pin length)	No Charge
R	LFIC Sargent	No Charge
S	LFIC Schlage	No Charge
Lever	Description	Price
WL	Winston Lever	No Charge
Finish Options	Description	Price
605	Bright Brass (03)	Add \$50.00
606	Satin Brass (04)	Add \$50.00
625	Bright Chrome (026)	Add \$50.00
626	Satin Chrome (26D)	No Charge
676 (while supplies last)	Black with Satin Chrome Accents	No Charge
744	Dark Bronze with Brass Accents (simulated 10B/613)	Add \$100.00

IMPORTANT NOTICE

dormakaba's E-Plex 5800 series Stand-Alone Electronic Locks and Controllers (SACs) have been approved by a certified GSA lab to meet FIPS 201.1 product standards. However, we cannot guarantee that all cards claiming to meet FIPS 201.1 will work with our products, as we have observed some cards that have been issued do not meet FIPS 201.1 specifications. This may be due to a card manufacturing defect, third party customization of the card, or damage done once the card was in circulation. It is the responsibility of the end-user Agency or Company to validate and verify that the specific credentials intended to be used with dormakaba's E5800 series Locks and Controllers are interoperable with our product. Our product warranty does not cover any replacement product or other costs due to specific cards not working with the E-Plex 5800 series products.

Selected finish options must be the same for both sides of the lock

** Interchangeable/Removable core cylinders are not included with the lock