


## Installing the Ilco® 129 Series Rim Exit Device with E-PLEX® (3000, 3200, 3600, 3700)

Kaba Access Control E-PLEX 3000, 3200, 3600 and 3700 series Narrow Stile Locks may be paired with the Ilco 129 Series Rim Exit Device.

The Kaba 3x6x Exit Device Spindle Assembly (order number 64802-000-01) is required for installation and operation. The Kaba Access Control spindle assembly must be inserted in the lower gear hole of the lock for the required 90 degree rotation of the Ilco rim exit device.

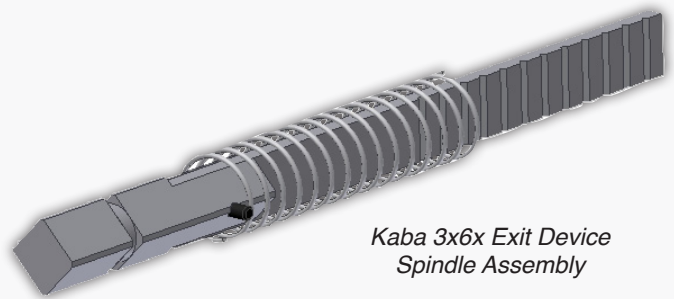

*Kaba 3x6x Exit Device  
Spindle Assembly*

Two cross hubs (one upper and one lower) are standard on the 129 series. Use the upper hub regardless of handing. This is necessary for downward lever travel.

For additional specifications and ordering information on the Ilco 129 Series Exit Device please refer to the Locks & Exit Devices Storefront Hardware Catalog and Aluminum Storefront Hardware Price list.

For additional information on the E-PLEX Series by Kaba Access Controls, visit [www.kabaaccess.com](http://www.kabaaccess.com)

