
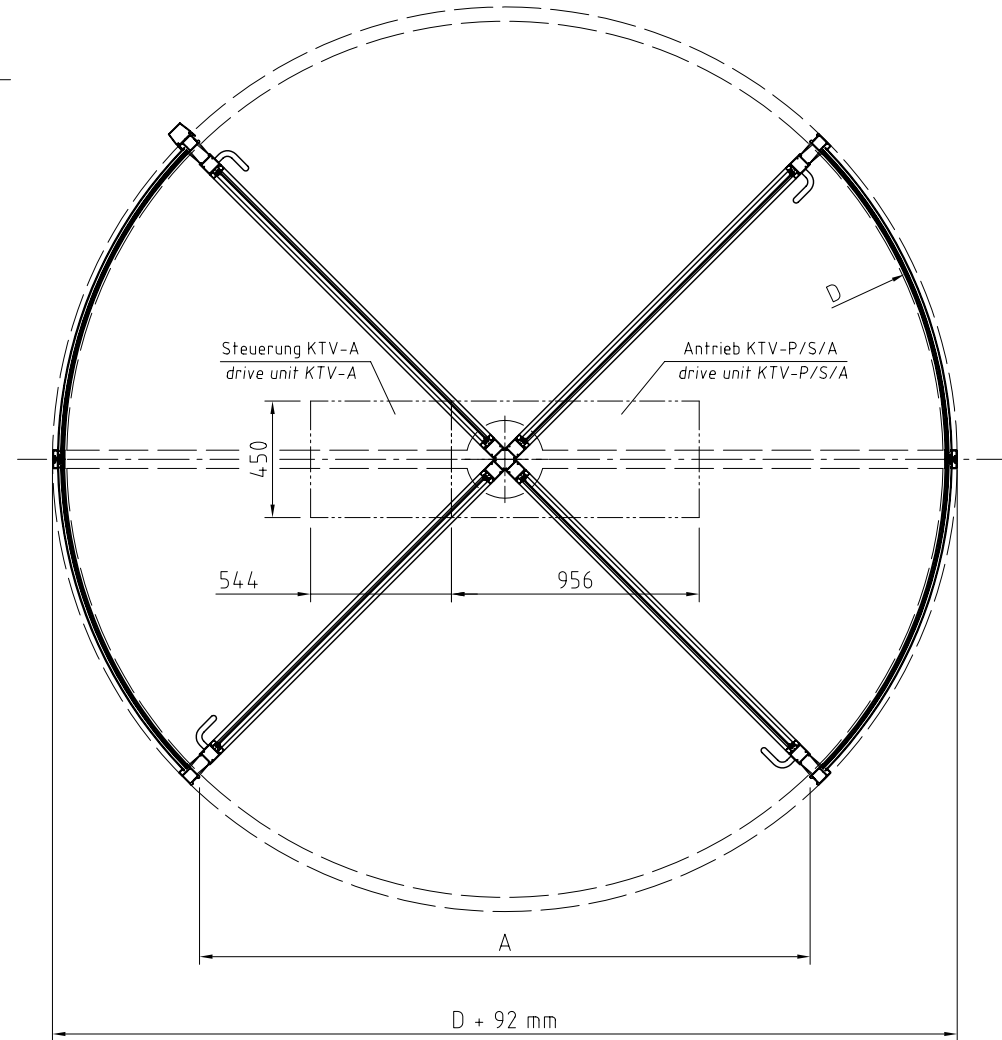


hier dargestellter Durchmesser (D) 3400 mm
drawing applies to diameter (D) 3400 mm

Bewegungsmelder (KTV-A/S)
movement sensor (KTV-A/S only)

Sicherheitssensor (KTV-A)
safety sensor (KTV-A only)

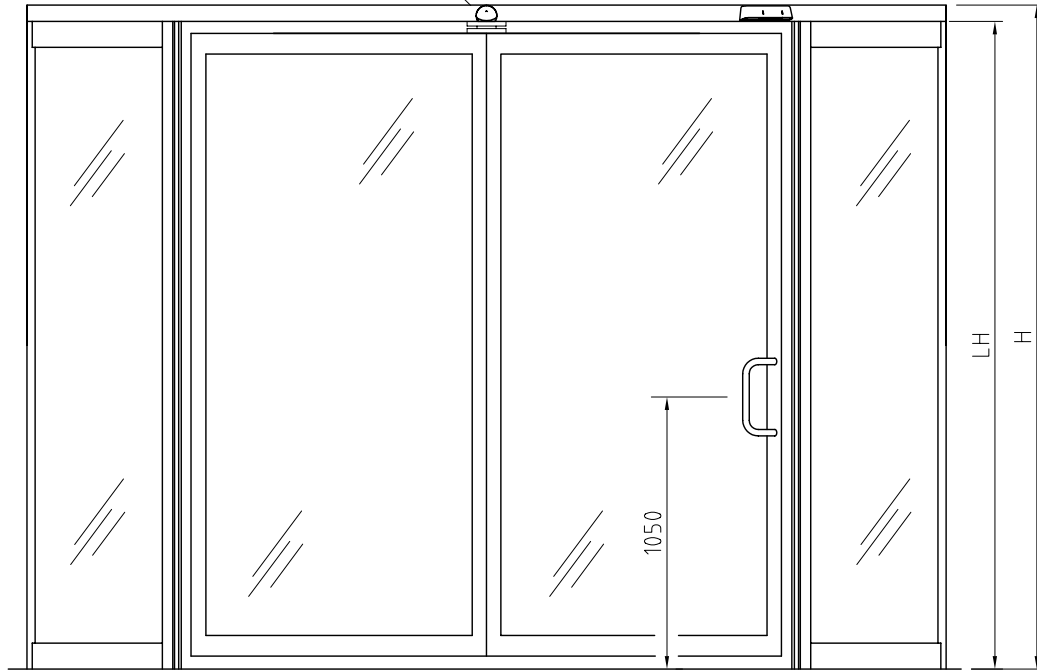

LH	H	D

LH (lichte Hoehe) 2100 - 4000 mm *
(passage hight) 2100 - 4000 mm *



H (ges. Hoehe) H = LH + 63 mm
(total hight) H = LH + 63 mm

D (Nenn ϕ) 3200; 3400; 3600; 3800 mm
(internal ϕ) 3200; 3400; 3600; 3800 mm

* siehe Abhängigkeitstabelle
* see dimension table

pcs. KTV with glass ceiling	St. KTV mit Glasdecke
Door leaf type:	Flügelart :
Surface finish :	Oberfläche :
Handles : Ogro TG 9126, 300 mm	Griffe : Ogro TG 9126, 300 mm
Floor covering :	Bodenbelag :

A = (Nennradius \times 1,414) - 35 mm
A = (internal radius \times 1,414) - 35 mm

Maßstab/Scale	1:10	3			
		2			
		1			
		0			
		3 2 1 0			
Allgemeine Toleranzen ISO 2768 - mK General tolerances		1. Ed. No. / Änderung No. Datum/Date Name CAD-Erstellt (C) Dorma Automatic GmbH+Co KG KT Systeme			
Bearb./Drawn	Datum/Date	Name	Kom./Order No.	Ausgabe/Issue:	
Gepr./Tested	17.10.07	H.Maron		Format : A1	
Norm./Stand				Ersatz/Replacem.:	
Ansicht / Grundriss		Zeichn. Nr	Ident.	Gruppe	Ed. Nr.
KTV, 4-flg., ab ϕ 3000, starr, o. NA		Drawing No.	Seq. No.	Group	Issue
BV.:		S 051-079A			
SFP Nr.		SFP No.			