

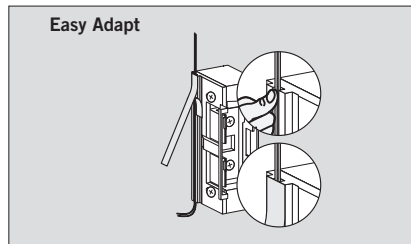
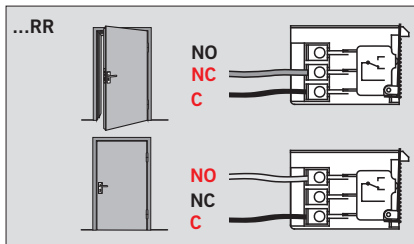
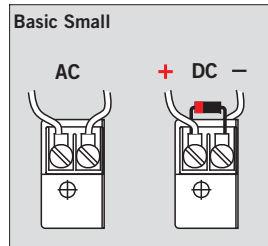


TÜRÖFFNER / ELECTRIC STRIKE

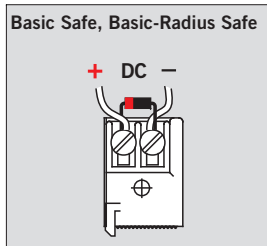

Basic, Smoke, Fire

WN 058351_45532_03/13

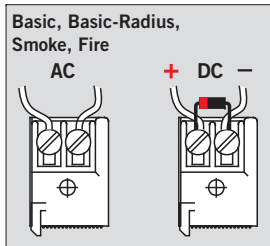

	DORMA GmbH + Co. KG		12	
	DORMA Platz 1			
	58 256 Emmetal/Germany			
	0432-CPD-0173	Smoke	2	S 18 A 0 L 2 1* 3
EN 14846:2008	Fire	2	S 18 E 0 L 2 1* 3	
Dangerous substances: None		*RR-Contact		


TÜRÖFFNER / ELECTRIC STRIKE

Lucky Basic, Lucky Smoke, Lucky Fire

12V DC I=240 mA (max. 400 mA)
 24V DC I=160 mA (max. 400 mA)
 Einschaltdauer(ED)/Duty factor (DF): 100%
 Einbaulage/fitting position: universal
 Kontaktbelastbarkeit/Contact rating: 48V/1A


12/24V DC

12/24V AC

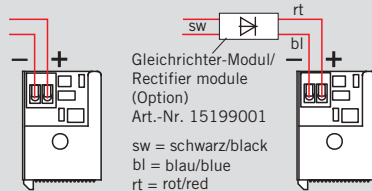


12/24V AC/DC


Gleichrichter-Modul/
 Rectifier module



Easy Adapt



...RR

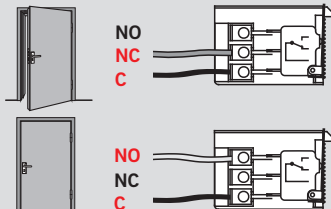

Änderungen vorbehalten
 Subject to change without notice

	DORMA GmbH + Co. KG		12	
	DORMA Platz 1			
	58 256 Ennepetal/Germany			
	0432-CPD-0173	Smoke	2	S 18 A 0 L 2 1* 3
EN 14846:2008	Fire	2	S 18 E 0 L 2 1* 3	
Dangerous substances: None				
*RR-Contact				