


MANET Schiebetürsystem CLASSIC/TREND

Max. Abstände der Befestigungspunkte für Laufschiennenrohr

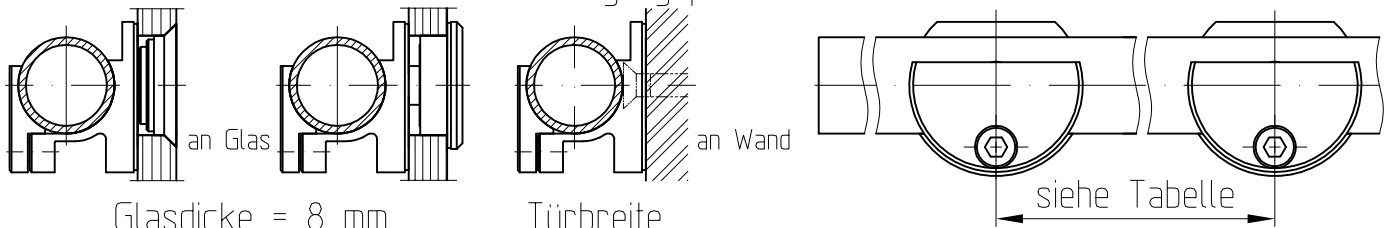

Glasdicke = 8 mm Türbreite

Türhöhe (mm)	700	800	900	1000	1100	1200	1300	1400
1900	350	400	450	500	550	600	590	580
2000	350	400	450	500	550	580	570	570
2100	350	400	450	500	550	570	560	560
2200	350	400	450	500	550	550	550	540
2300	350	400	450	500	550	540	540	530
2400	350	400	450	500	530	530	530	520
2500	350	400	450	500	520	520	520	510

Glasdicke = 10 mm Türbreite

Türhöhe (mm)	700	800	900	1000	1100	1200	1300	1400
1900	350	400	450	500	550	550	550	540
2000	350	400	450	500	540	540	530	530
2100	350	400	450	500	530	530	520	520
2200	350	400	450	500	520	510	510	500
2300	350	400	450	500	510	500	500	490
2400	350	400	450	500	500	490	490	480
2500	350	400	450	490	490	480	480	470

Glasdicke = 12, 13,5 mm Türbreite

Türhöhe (mm)	700	800	900	1000	1100	1200	1300	1400
1900	350	400	450	500	530	520	510	510
2000	350	400	450	500	510	510	500	500
2100	350	400	450	500	500	500	490	490
2200	350	400	450	490	490	480	480	470
2300	350	400	450	480	480	470	470	460
2400	350	400	450	470	470	460	460	-
2500	350	400	450	460	460	450	450	-

Glasdicke = 15,5 mm Türbreite

Türhöhe (mm)	700	800	900	1000	1100	1200	1300	1400
1900	350	400	450	490	490	480	480	470
2000	350	400	450	480	480	470	470	-
2100	350	400	450	470	460	460	-	-
2200	350	400	450	460	450	450	-	-
2300	350	400	450	450	440	-	-	-
2400	350	400	440	440	430	-	-	-
2500	350	400	430	430	-	-	-	-

Glasdicke = 17,5 mm Türbreite

Türhöhe (mm)	700	800	900	1000	1100	1200	1300	1400
1900	350	400	450	480	480	470	470	-
2000	350	400	450	470	470	460	-	-
2100	350	400	450	460	450	-	-	-
2200	350	400	450	450	440	-	-	-
2300	350	400	440	440	-	-	-	-
2400	350	400	430	430	-	-	-	-
2500	350	400	420	420	-	-	-	-

Glasdicke = 19 mm Türbreite

Türhöhe (mm)	700	800	900	1000	1100	1200	1300	1400
1900	350	400	450	450	450	-	-	-
2000	350	400	450	440	-	-	-	-
2100	350	400	430	430	-	-	-	-
2200	350	400	420	-	-	-	-	-
2300	350	400	410	-	-	-	-	-
2400	350	400	-	-	-	-	-	-
2500	350	400	-	-	-	-	-	-