
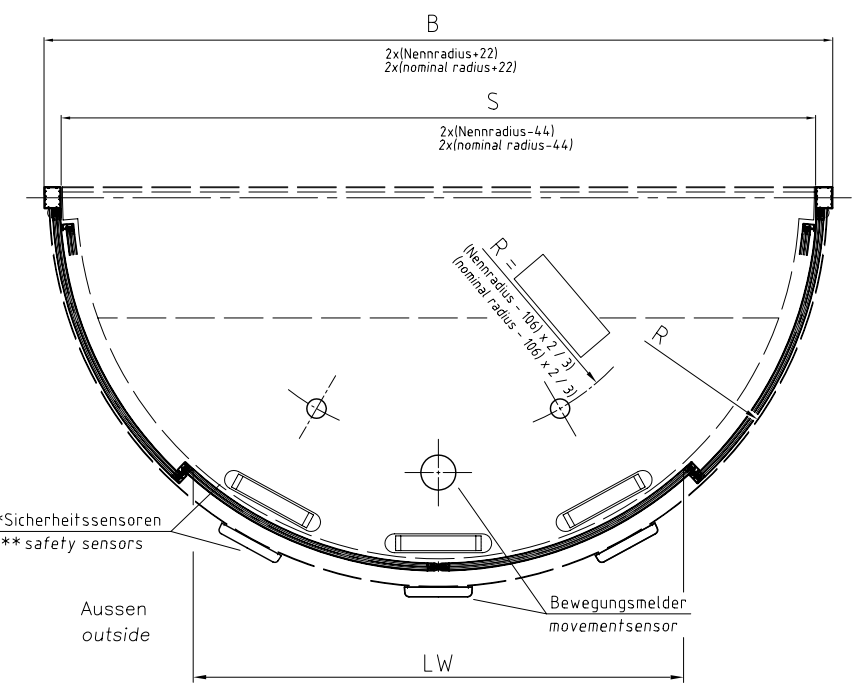


hier dargestellt: Nennradius (R) 1500 mm
drawing applies to: nominal radius (R) 1500 mm

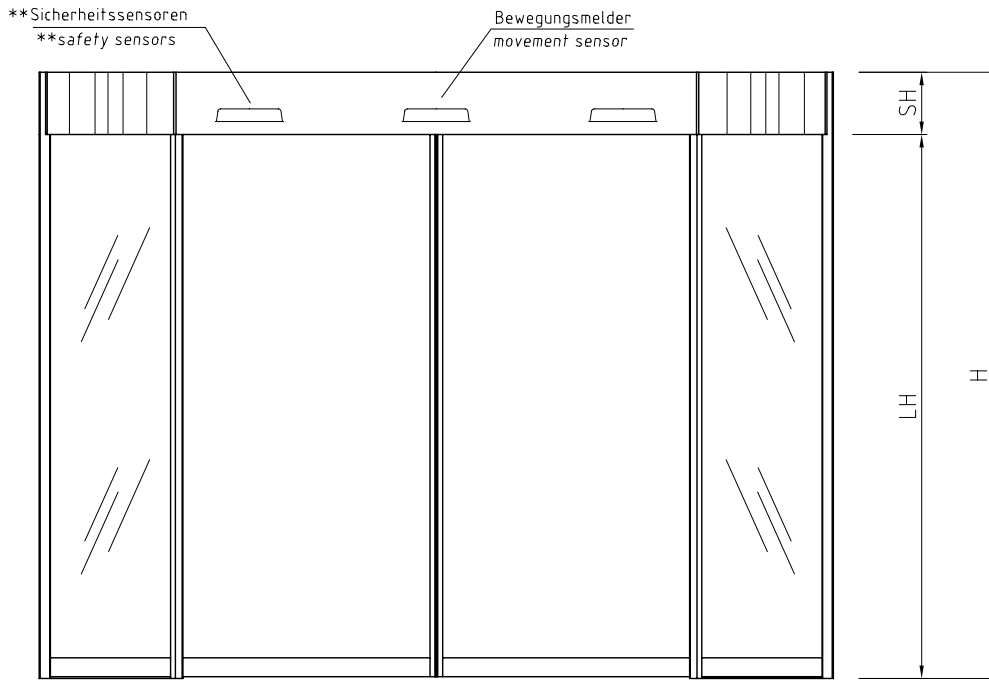

LH	SH	H	LW	R	B	S

LH (lichte Hoehe) 2100 – max. Höhe*
(passage height) 2100 – up to max. height*

SH (Stirnbandhoehe) min. 240
(canopy height) min. 240

H (ges. Hoehe)
(total height)

R (Nennradius) 1000 – 2000mm
(nominal radius) 1000 – 2000mm

*siehe Abhängigkeitstabelle
*see dimension table

pcs. BST / FBST	St. BST / FBST
Surface finish :	Oberfläche :
Lamps :	Lampen :
Floor covering :	Bodenbelag :

** Der Einsatz der markierten Komponenten kann je nach Land variieren. Diese Komponenten sind entsprechend der gültigen Vorschriften des jeweiligen Landes auszuwählen. Bei Türen nach DIN 18650 darf keine Komponente entfallen.

The use of the marked components may vary depending on the country. These components are to be chosen according to the valid regulations of the corresponding country. The omission of components is not allowed with doors according to DIN 18650

Maßstab/Scale	1:10	3			
		2			
		1			
		0 B	18.02.08	M.Gansen	
Allgemeintoleranzen General tolerances		Datum/Date	Name	Kom./Order No.	
Bearb./Drawn	26.02.07	MF			Ausgabe/Issue:
Gepr./Tested					Format : A1
Norm/Stand					Ersatz./Replacem.:
(F)BST SPECIAL LINE – ISO 180° Grundriss top view		Zeichn. Nr. Drawing No.	Gruppen Group	Bl. Nr. Sheet No.	Blatt/Sheet
BV:		S 550-002B		1	
bp.:		9501955000200			

The responsibility for the selection of the components of this drawing lies with the user. The user must ensure that the components are suitable for the intended application and that they comply with the relevant regulations. The manufacturer is not responsible for the selection of the components.