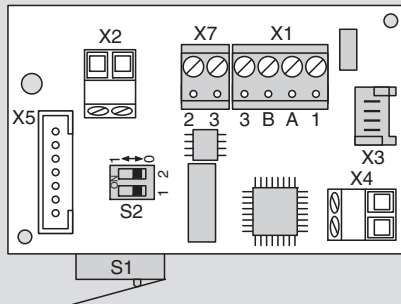


WN 055372 45532  
10/11

Elektrostatisch gefährdete  
Bauelemente


Static sensitive devices

Circuits sensibles à  
l'électricité statique

Elementi costruttivi sensibili  
all'elettricità statica

Elektrostatisch gevoelige  
componenten

### Beschaltung TV 1xx DCW®

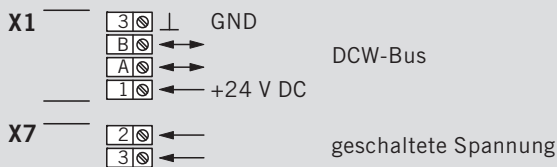

D

### Beschreibung TV 1xx DCW®

- X1** Verbindung zur TL-S TMS.
- X2** Verbindung zum internen Türkontakt.
- X3** Verbindung zum Verriegelungs-Magneten.
- X4** Verbindung zum internen Türkontakt.
- X5** Verbindung zur Firmware-Programmierung.
- X7** "Not aus"-Kreis.
- S1** Sabotage-Gehäuse-Kontakt.
- S2** Mikro-Schalter zur Einstellung der Komponentenadressen:


Schalter		Adresse
1	2	
0	0	1
1	0	2
0	1	3
1	1	4

### Technische Daten:

Versorgungsspannung: 24 V DC, +/- 10%  
stabilisiert

Stromaufnahme: 280 mA

### Terminal connections TV 1xx DCW®

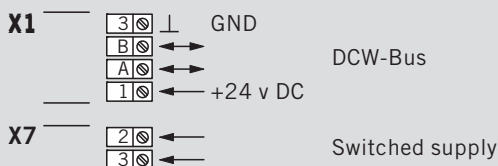

GB

### Description TV 1xx DCW®

- X1** Connection to TL-S TMS.
- X2** Connection to internal door contact.
- X3** Connection to locking magnet.
- X4** Connection to internal door contact.
- X5** Connection to firmware programming.
- X7** "Emergency Off"-circuit.
- S1** Anti-tamper housing contact.
- S2** Micro-Switch to adjustment of komponent addresses:

Switch		Address
1	2	
0	0	1
1	0	2
0	1	3
1	1	4

### Technical data:

Power supply: 24 v DC, +/- 10%  
stabilised

Current input: 280 mA

Änderungen vorbehalten  
Subject to change without notice