


MUTO Comfort Teleskop Bestellblatt 2-flügelige Montage an Wand / Decke / Glas



Wandmontage	
Anlagenansicht	36-720
Systemschnitt	36-710



Deckenmontage	
Anlagenansicht	36-721
Systemschnitt	36-711

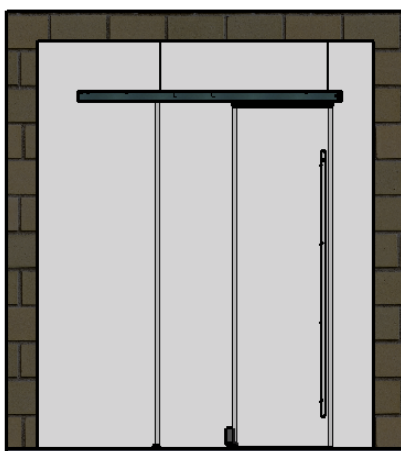

Montage an Glas	
Anlagenansicht	36-722
Systemschnitt	36-712

Kundenangaben zur Anlagenplanung

max. Flügelgewicht		2x80	kg
max. Flügelhöhe		3000	mm
Glasart		ESG / VSG	
Glasdicke		8-13,5	mm
Wandmontage / 2-flügelig			
Deckenmontage / 2-flügelig			
Montage an Glas / 2-flügelig			
Lichte Weite	LW		mm
Lichte Höhe (UK Laufschiene)	LH		mm
nach DORMA Systemschnitt			
Glashöhe Schnellläufer	HSL		mm
Glashöhe Langsamläufer	HLL		mm
Glasdicke ESG 8/10/12	T		mm
Glasdicke VSG 10,8-13,5	T		mm
Öffnungsrichtung rechts			
Öffnungsrichtung links			
mit DORMOTION			
ohne DORMOTION			
mit Griffmuschel			
mit Griffstange			
Griffstangenüberstand	V		mm
mitfahrende Bodenführung			
Unterflurbodenführung			
Oberfläche			

DORMA-Angaben zur Anlagenplanung


Anlagentyp / Set			
Angebots- Auftragsnummer			
Laufschiene(n)länge	B		mm
Glasbreite Schnellläufer	SL		mm
Glasbreite Langsamläufer	LL		mm
Durchgangsbreite	LDW		mm

Anlagenfreigabe

Datum	
Kunde	
Stempel	

MUTO Comfort Telescopic order sheet


2 door panel fixed at wall / ceiling / glass

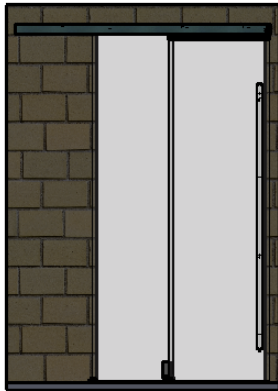

wall installation	
plan view	36-720
cross section	36-710



ceiling installation	
plan view	36-721
cross section	36-711

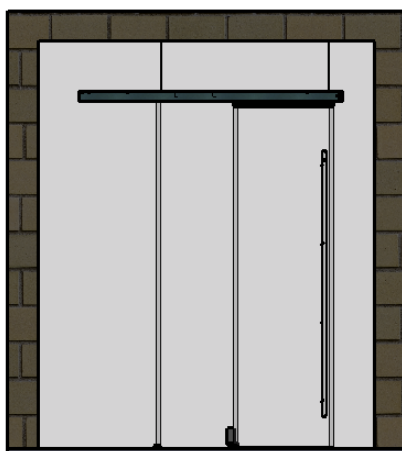

glass installation	
plan view	36-722
cross section	36-712

customer specifications for system plan

max. panel weight		2x80	kg
max. panel height		3000	mm
type of glass		TSG / LSG	
glass thickness		8-13,5	mm
wall installation - 2 door panel			
ceiling installation - 2 door panel			
glass installation - 2 door panel			
clear width	LW		mm
clear height (lower edge track)	LH		mm
from DORMA cross section			
glass height fast mover	HSL		mm
glass height slow mover	HLL		mm
glas thickness TSG 8/10/12	T		mm
glas thickness LSG 10,8-13,5	T		mm
opening to right side			
opening to left side			
with DORMOTION			
without DORMOTION			
with recessed pull grip			
with handle bar			
overlapping size of handle bar	V		mm
movable floor guide			
recessed floor guide profile			
colour / finish			

DORMA specifications for system plan

assembly type / set			
offer- order number			
track profile length	B		mm
glass width fast mover	SL		mm
glass width slow mover	LL		mm
clear opening width	LDW		mm

system approval

date	
customer stamp	