




MUTO Comfort Telekop Bestellblatt 4-flügelig Montage an Wand / Decke / Glas

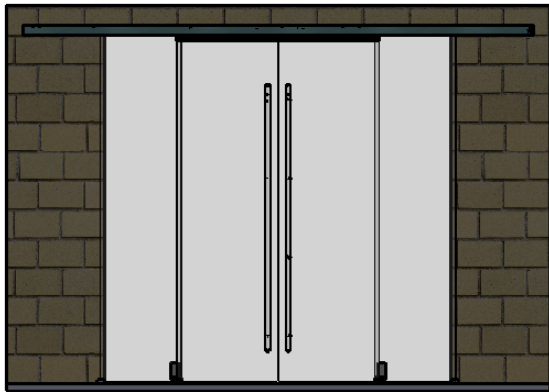

Wandmontage	
Anlagenansicht	36-723
Systemschnitt	36-710

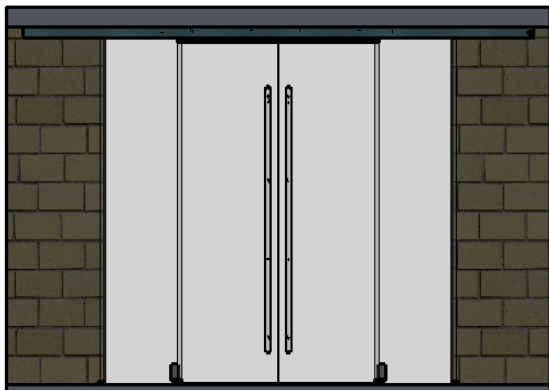

Deckenmontage	
Anlagenansicht	36-724
Systemschnitt	36-711

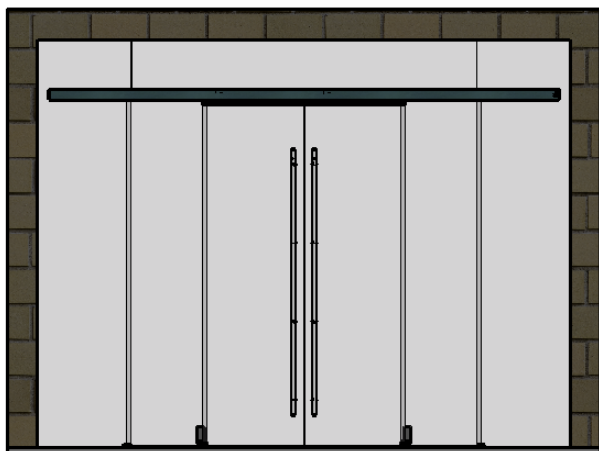


Montage an Glas	
Anlagenansicht	36-725
Systemschnitt	36-712


Kundenangaben zur Anlagenplanung			
max. Flügelgewicht		4x80	kg
max. Flügelhöhe		3000	mm
Glasart		ESG / VSG	
Glasdicke		8-13,5	mm
Wandmontage / 4-flügelig			
Deckenmontage / 4-flügelig			
Montage an Glas / 4-flügelig			
Lichte Weite	LW		mm
Lichte Höhe (UK Laufschiene)	LH		mm
nach DORMA Systemschnitt			
Glashöhe Schnellläufer	HSL		mm
Glashöhe Langsamläufer	HLL		mm
Glasdicke ESG 8/10/12	T		mm
Glasdicke VSG 10,8-13,5	T		mm
Öffnungsrichtung		beidseitig	
mit DORMOTION			
ohne DORMOTION			
mit Griffmuschel			
mit Griffstange			
Griffstangenüberstand	V		mm
mitfahrende Bodenführung			
Unterflurbodenführung			
Oberfläche			
DORMA-Angaben zur Anlagenplanung			
Anlagentyp / Set			
Angebots- Auftragsnummer			
Laufschiene(n)länge	B		mm
Glasbreite Schnellläufer	SL		mm
Glasbreite Langsamläufer	LL		mm
Durchgangsbreite	LDW		mm
Anlagenfreigabe		Datum	
		Kunde	
		Stempel	

MUTO Comfort Telescopic order sheet


4 door panel fixed at wall / ceiling / glass

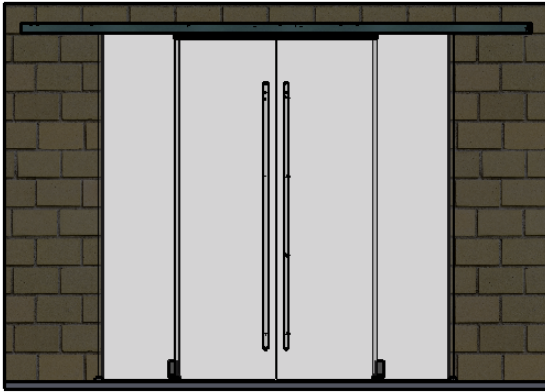

wall installation	
plan view	36-723
cross section	36-710

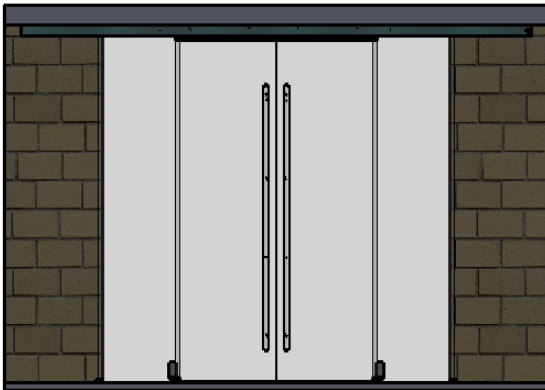

ceiling installation	
plan view	36-724
cross section	36-711

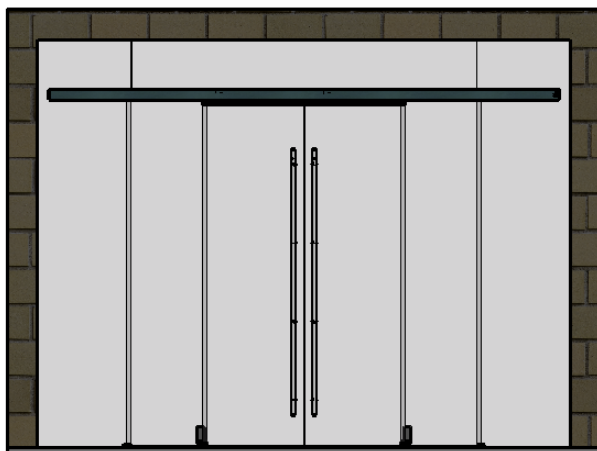

glass installation	
plan view	36-725
cross section	36-712

customer specifications for system plan			
max. panel weight		4x80	kg
max. panel height		3000	mm
type of glass		TSG / LSG	
glass thickness		8-13,5	mm
wall installation - 4 door panel			
ceiling installation - 4 door panel			
glass installation - 4 door panel			
clear width	LW		mm
clear height (lower edge track)	LH		mm
from DORMA cross section			
glass height fast mover	HSL		mm
glass height slow mover	HLL		mm
glas thickness TSG 8/10/12	T		mm
glas thickness LSG 10,8-13,5	T		mm
opening		on both sides	
with DORMOTION			
without DORMOTION			
with recessed pull grip			
with handle bar			
overlapping size of handle bar	V		mm
movable floor guide			
recessed floor guide profile			
colour / finish			
DORMA specifications for system plan			
assembly type / set			
offer- order number			
track profile length	B		mm
glass width fast mover	SL		mm
glass width slow mover	LL		mm
clear opening width	LDW		mm
system approval		date	
		customer	
		stamp	