



MUTO Comfort Teleskop Bestellblatt 2- und 4-flügelig an Decke mit Seitenteil(en)

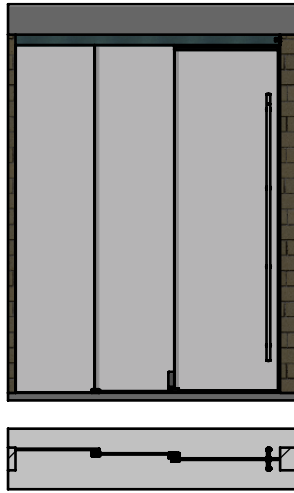


Deckenmontage	
Anlagenansicht	36-726
Systemschnitt	36-713

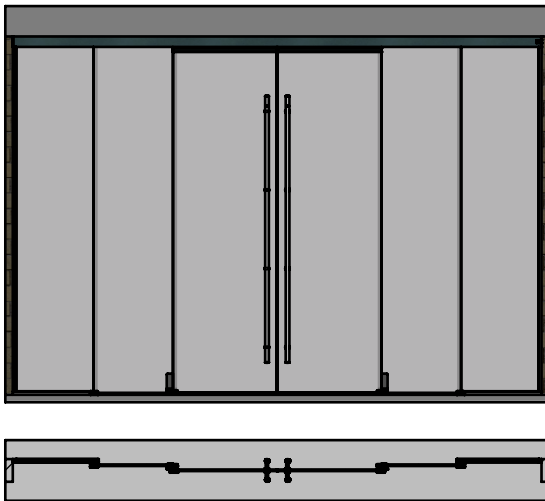


Deckenmontage	
Anlagenansicht	36-727
Systemschnitt	36-713

Kundenangaben zur Anlagenplanung			
max. Flügelgewicht		2x80 / 4x80	kg
max. Flügelhöhe		3000	mm
Glasart		ESG / VSG	
Glasdicke		8-13,5	mm
Deckenmontage / 2-flügelig			
Deckenmontage / 4-flügelig			
Lichte Weite	LW		mm
Lichte Höhe (UK Laufschiene)	LH		mm
nach DORMA Systemschnitt			
Glashöhe Schnellläufer	HSL		mm
Glashöhe Langsamläufer	HLL		mm
Glasdicke ESG 8/10/12	T		mm
Glasdicke VSG 10,8-13,5	T		mm
Öffnungsrichtung rechts			
Öffnungsrichtung links			
Öffnungsrichtung beidseitig			
mit DORMOTION			
ohne DORMOTION			
mit Griffmuschel			
mit Griffstange			
Griffstangenüberstand	V		mm
mitfahrende Bodenführung			
Unterflurbodenführung			
Oberfläche			
Kundenangaben zur Anlagenplanung			
Anlagentyp / Set			
Angebots- Auftragsnummer			
Laufschielenlänge	B		mm
Glasbreite Schnellläufer	SL		mm
Glasbreite Langsamläufer	LL		mm
Durchgangsbreite	LDW		mm
Anlagenfreigabe		Datum	
		Kunde	
		Stempel	

MUTO Comfort Telescopic order page 2- and 4- panel fixed at ceiling with side panel(s)

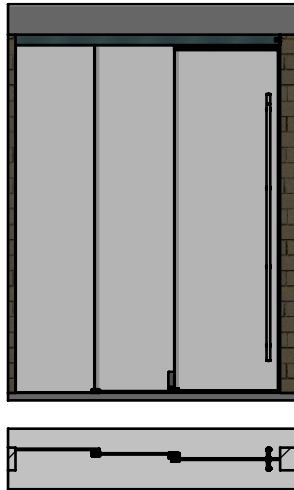

ceiling installation	
plan view	36-726
cross section	36-713

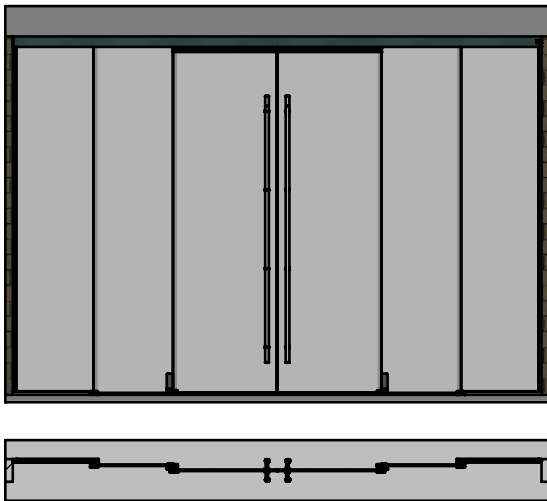

ceiling installation	
plan view	36-727
cross section	36-713

customer specifications for system plan			
max. panel weight		2x80 / 4x80	kg
max. panel height		3000	mm
type of glas		ESG / VSG	
glass thickness		8-13,5	mm
ceiling installation - 2 door panel			
ceiling installation - 4 door panel			
clear width	LW		mm
clear height (lower edge track)	LH		mm
from DORMA cross section			
glass height quick mover	HSL		mm
glass height slow mover	HLL		mm
glas thickness TSG 8/10/12	T		mm
glas thickness LSG 10,8-13,5	T		mm
opening to right side			
opening to left side			
opening on both sides			
with DORMOTION			
without DORMOTION			
with recessed pull grip			
with handle bar			
overlapping size of handle bar	V		mm
movable floor guide			
recessed floor guide profile			
Colour/Surface			
customer specifications for system plan			
plant system / set			
offer- order number			
profile length	B		mm
glass width quick mover	SL		mm
glass width slow mover	LL		mm
clear opening width	LDW		mm
system approval		date	
		customer	
		stamp	