

## Gitcon Model G-2 Lock Preparation

### **BASIC TOOLS AND MATERIALS REQUIRED**


---

1. Four new high quality (Energizer<sup>®</sup>, Duracell<sup>®</sup>, etc.) AA lithium batteries.
2. Phillips screwdriver.

### **Battery Installation**

---

**NOTE:** The lock shackle must be in the open position (as shipped from the factory) in order to remove the battery housing back plate. If the lock shackle is closed, insert a 9volt battery in the Supplementary Power Connection and follow steps 1-6 of the Operational Check.

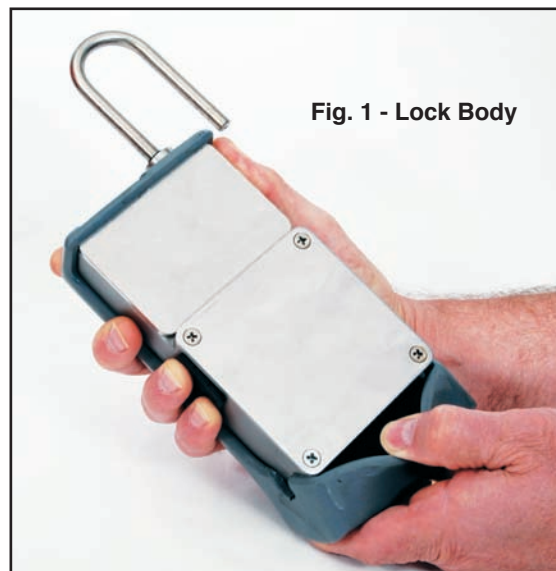

1. Remove the bottom of the Weather Guard from the lock body. (See Fig. 1.)
2. Remove the battery housing plate (4 screws) located at the back, lower section, of the lock.
3. Place four new high quality lithium batteries in the battery retainer.
4. Reattach the battery housing plate.
5. Reattach Weather Guard.

***(See back for Operational Check.)***

## OPERATIONAL CHECK

---

Make the operational check of the unit by performing the following actions.

1. Secure shackle
2. Press & Release **Red** Button
3. "**UNLK**" prompt appears; Press & Release **Red** Button again
4. **Green** Light Flashes
5. Present Card
6. "**Open**" prompt appears; Plunge and lift shackle

---

**Notice:** Information in this document is subject to change without notice. Kaba Mas shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from the furnishing, performance or use of this material.

---

© 2006 Kaba Mas Corporation. All rights reserved.

Kaba Mas Corporation  
749 W. Short Street, Lexington, KY 40508 USA  
Phone: (859) 253-4744 FAX: (859) 255-2655  
Technical Support: (800) 950-4744  
[www.kaba-mas.com](http://www.kaba-mas.com)