



HTS-M01

Waist height turnstiles

Standard units	HTS-M01
Construction	
Material	AISI 304 stainless steel / toughened safety glass, 3/8" (10 mm).
Side barrier elements	Made of AISI 304 tubular stainless steel, Ø1-7/8" (Ø48 mm), mitered, with 8 mm tempered safety glass.
Rotating unit	180° rotating unit; tubular column made of AISI 304 stainless steel, Ø5-1/2" (Ø140 mm). With two tall glass elements and stainless steel bar handles. Locking system, drive, and toothed clutch installed in tubular column.
HTS-M01 swing door	Tubular column made of Ø5-1/2" (Ø140 mm) stainless steel with 3/8" (10 mm) TSG glass element and bar handle.
Finish	Stainless steel satin finish.
Function	Power assist; servo-positioning drive/ electrically controlled in both directions.
Electrical equipment	Two control units in external switch cabinet: H 11-1/8" x W 6-5/8" x D 4-1/2" (H 283 mm x W 168 mm x D 115 mm).
Power supply	110 – 230 VAC, 50/60 Hz, 253 VA. In case of power failure both directions free.
Standby power consumption	15 VA.
Installation	Finished floor. Not suitable for outdoor installation.
Protection classes	Housing IP43, components conducting supply voltage IP54.

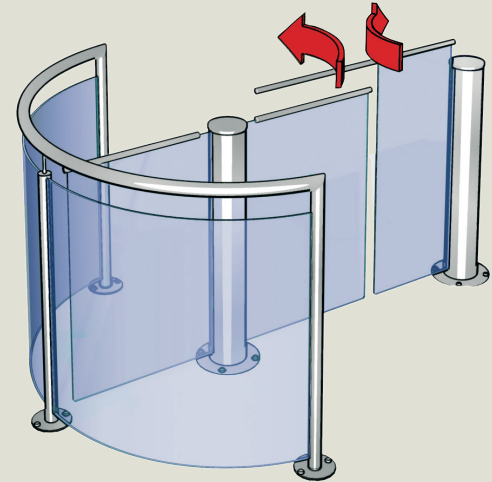

HTS-M01 elevation drawings

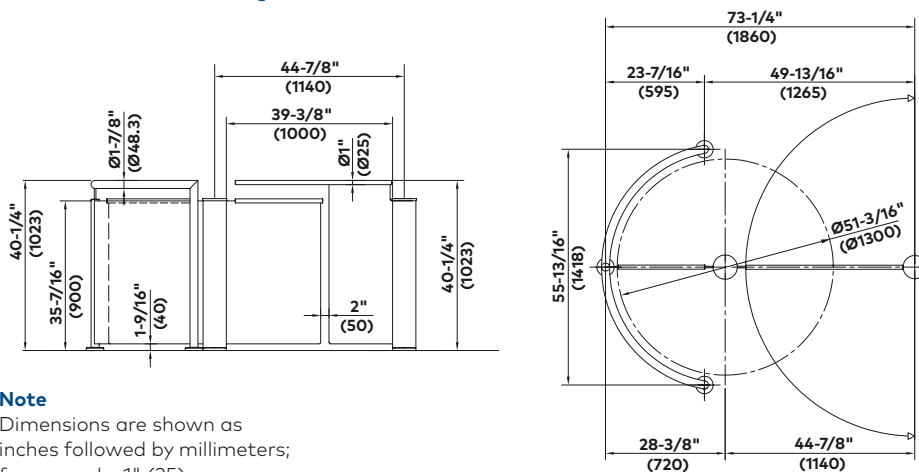


Note

Dimensions are shown as inches followed by millimeters; for example, 1" (25).


HTS-M01

Installation examples

Guiding elements



Column



Options

Electrical equipment

Installation preparation with adapter or mounting plate.	<input type="radio"/>
Consoles with adapter made of plastic or aluminium (also available in stainless steel for an additional charge).	<input type="radio"/>
Operating panels and frames or surface mount housing.	<input type="radio"/>

optional