



Swing door Operating & Maintenance Manual

For power-operated doors to EN 16005

Important warranty, user information
and service record for your automatic door

Contents

Introduction	2
Service and maintenance	2
Warranty Statement	3
Door system data	4
Report for Initial Inspection	5
User guide	6
First entry last exit procedure (if fitted)	7
Daily checks	8
Regular inspection and maintenance	9
Inspection reports	10

Introduction

The purpose of this manual is to make the user aware of the important steps for the operation and maintenance of the ED Series door operator to ensure safe and reliable operation during its working life.

This manual should be retained by the door user as evidence of its correct installation and routine care to comply with safety requirements EN16005: 2012. Used in conjunction with the door installers commissioning compliancy statement it provides a log of door maintenance activity as evidence by the owner / manager providing advice on routine inspection schedules and fault reporting.

Service and maintenance

Why the necessity?

All doors, whether manual or automatic, are complex components subject to punishing wear and tear. Therefore to ensure that they continue to function properly, regular service and maintenance is imperative.

Regular door maintenance helps prevent accidents, reduces breakdowns and the accompanying inconvenience, and prolongs the life of the door operator.

There are also legal implications regarding the servicing of all door types which must be adhered to, to ensure the safety of users at all times. All safety requirements for power operated doors are stipulated in EN 16005:2012 Power operated pedestrian doorsets - Safety in use. All dormakaba service engineers are trained to comply with this standard through the Automatic Door Suppliers Association (ADSA) examination of competency.

dormakaba provides a tailored, local resource for the servicing and maintenance of all brands of:

- automatic swing
- sliding and revolving doors
- manual doors
- fire doors
- access control systems
- industrial doors
- roller shutters.

For more information visit www.dormakaba.co.uk

Warranty Statement

Thank you for purchasing a dormakaba product which has been designed and manufactured to provide many year's problem-free operation.

All products sold by Dorma UK Ltd are warranted against defect in materials and workmanship for a period of 12 months from the date of purchase on a return to factory basis.

If you believe this product has a defect or has failed during normal use within the warranty period, please contact the authorised agent from whom you bought the product and who will make arrangements for its return.

Alternatively, if your product was installed by dormakaba please contact us directly as detailed below to discuss the return of the unit, with the product serial number. dormakaba standard terms and conditions will apply at all times and are available on request.

Limitations

This warranty does not apply to defects resulting from Customer actions, such as mishandling, improper installation, operation outside of design limits, misapplication, attempted repair, or unauthorized modification.

Any additional warranty provided by the selling agent does not imply or transfer any additional obligation to dormakaba regarding this product.

dormakaba standard terms and conditions will apply at all times and are available on request.

dormakaba are not liable for the consequences of any third party claim on its products, which are sold in the knowledge that installation is carried out by competent staff and maintained in accordance with current safety standards.

Service and maintenance

Please note the legal implications regarding the installation and servicing of automatic doors which must be adhered to, so as to ensure the safety of users at all times as stipulated in EN 16005:2012 Power operated pedestrian doorsets – Safety in use.

Product registration

Any decision to register your product does not affect your statutory rights under the UK Sale of Goods Act 1979.

If you would like to register your product with dormakaba please visit www.dormakaba.co.uk Alternatively, you can contact the dormakaba UK Service Hotline on:

0800 212 380
service.uk@dormakaba.com
www.dormakaba.co.uk

Door system data

In order that an automatic door operator may comply with the requirements of EN16005:2012 a risk assessment should be carried out prior to installation which assesses the risk to users. It is the responsibility of the installer to ensure that a door system is compliant.

To be completed by a qualified technician at installation

Manufacturer: DORMA UK Ltd, Wilbury Way, Hitchin, SG4 0AB

Type of operator/door: Swing Door

To be completed by a qualified technician at installation

Product name: ED100 / ED250 / ED200 / ED200i / Other (please state below):

(delete as applicable).....

Sales Order No.:

Asset No.:

Year of construction.....

Commission date:

Installed by: DORMA UK Ltd / Other (please state company)

Doorset location / reference:

Additional information:

.....
.....
.....
.....
.....
.....
.....
.....
.....
.....

Report for initial inspection

To be completed by a qualified technician at installation

The following list of components and functions to be inspected is only a reference and shall help the inspector during inspection. From case to case, the inspection can be more or less comprehensive. In principle, the inspector has to perform a visual inspection and functional tests to check the system for completeness. In addition, the system status and the efficiency of the components and the respective safety equipment require inspection. Please consider the separate inspection instructions supplied with the individual door types.

3.1 General

- Functionality of door system
- Proper mounting
- Connections/Power supply
- Guide rails and base sections
- Force transmission/Incremental encoder
- Bearings
- Glazing, Cover
- Coating, Corrosion protection
- All documentation complete

3.2 Check safety equipment according to risk assessment to EN 16005

- Finger protection (crushing, shearing and drawing in)
- Safety sensors/Sensor monitoring
- Reversing/Stop equipment
- Safety screen
- Safety contact strips (SCS)
- Force limitation
- Emergency pushbuttons
- Safety sensors
- Fire alarm connection
- Batteries

3.3 Control elements

- Pushbuttons/switches
- Contact mats
- Radio controls/Remote controls
- Card readers
- Motion detectors

3.4 Function

- Friction clutch
- contact (limit switch)
- NO contact (limit switch)
- Locking device, Deactivation
- Deactivation of safety equipment
- Emergency manual operation
- Emergency Opening/Rubber cord/Auxiliary drive

3.4 Check door system for proper functioning in all operation modes

- OFF
- AUTOMATIC
- PERMANENT OPEN
- PARTIAL OPEN
- EXIT ONLY
- LOCKING DEVICES

Date of inspection:


Name of inspector (in block letters):

(Qualified technician)

Note: The safety compliance of an automatic door system is dependent on the appropriate choice and combination of other safety equipment with the operator and must be assessed as the whole system.

User guide

Operator Rocker Switches

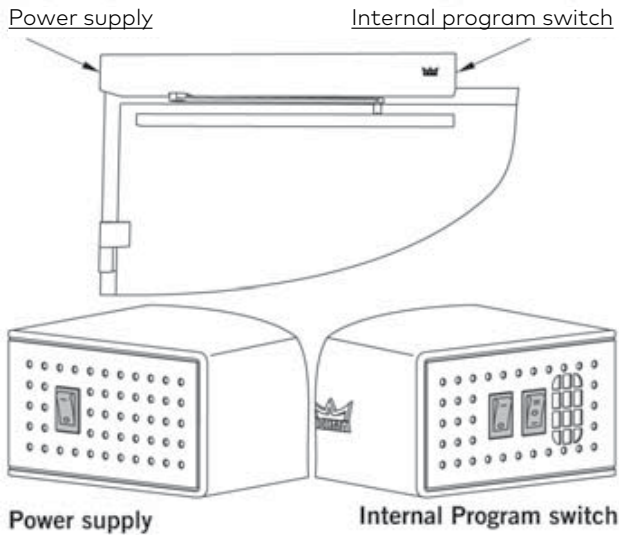

Power Supply Switch




OFF
This will remove power to the operator and the door will settle into a closed position.




ON
This will energise the operator which will commence its start-up measurement cycle before settling in a closed position.

NOTE: In the event of power failure the door will go to its closed position but can be operated manually.


Internal Program Switches




OFF
Adjust both switches to '0'.



AUTOMATIC
Adjust the front switch to to '0', and the other switch to 'I'. Low Energy Unit – the door can be used manually, or automatically using the operating devices that have been installed (e.g. push pads)




PERMANENTLY OPEN
Adjust the front switch to to '0', and the other switch to 'II'.



EXIT ONLY
Adjust the front switch to to 'I', and the other switch to 'I'.

Remote Programme Switch

For installations where access to the Operator Rocker Switches is not convenient or safe a Remote Programme Switch may be installed. This will appear as below.

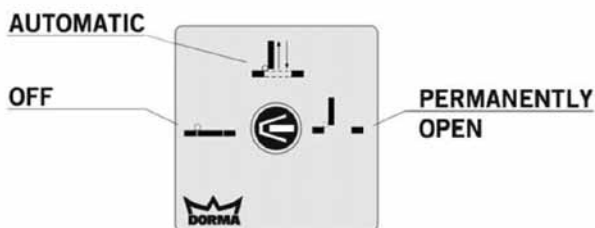


Program switch settings

OFF



Door Closed and locked with integral lock, will only respond to a first entry - last exit switch - if fitted.

AUTOMATIC



Normal daytime operation. Low Energy Unit – the door can be used manually, or automatically using the operating devices that have been installed (e.g. push pads).

PERMANENTLY OPEN



Door remains fully open, if the door was closed when this is selected - the door will open and remain open.

In the event of power failure

- The door will normally remain closed and can be operated manually
- Alternatively, the door may be fitted with an electric locking system.

There are two basic types of lock operation.

- Fail safe: Door lock will release allowing manual operation
- Fail secure: Door will remain locked and can be released using the door latch

First entry last exit procedure (if fitted)

The purpose of this system is to allow an opening of the door when the Program Switch is in the OFF position and the sensors are not operable.

There will be a GREEN BUTTON near to the door on the inside of the building



To EXIT the building:

1. Turn the program switch to the OFF position and let the door close (stand away from the door to ensure the sensor does not detect you).
2. Set the building alarm (if you have one)
3. Operate the GREEN BUTTON to open the door
4. Exit and allow the door to close (stand away from the door to ensure the sensor does not detect you), then lock the door in the centre with the key when closed.

There will be a KEY SWITCH or other access control, on the outside of the building



To ENTER the building:

1. Unlock the door, before using the KEY SWITCH
2. Operate the key switch on the outside of the building, this will open the door
3. Enter the building (stand away from the door to ensure the sensor does not detect you), the door will then close behind you
4. Turn off the building alarm (if you have one)
5. Put the program switch into the required position, or leave it in the OFF position
6. If required to admit staff members before opening hours, simply press the GREEN BUTTON. The door will open then re-close.

Daily checks - facility operator

A safety check should be performed daily by the facility operator on each automatic door.

Activation

Walk toward the door at a normal pace. The door should start opening before you reach a minimum of 1000mm from the door. If the door is an escape route, a minimum of 1500mm applies in the direction of escape. If the door opens toward you, the measurements are taken from the front edge of the door in the fully open position. Repeat for the other side if the door has two-way operation.

Safety Note: In order to test the safety sensors we recommend using an approved test object measuring 200mm x 300mm x 700mm high to test the door safety as detailed in BS EN16005.

During the Closing Cycle

Activate the door and place the test object within the protected sweep area of the door. The door should begin to close. The test object should be detected without contact and the door should reopen.

During the Opening Cycle

With the door closed, place the test object within the protected sweep area of the door. Activate the door. The test object should be detected without contact and the door should remain closed or stop.

In the case of Low Energy Swing Doors

- Safety devices as described above may not be fitted but are optional
- Usually have manual activation devices
- Travel at lower speeds with lower force
- In the opening and closing direction will stop when obstructed and continue after the obstruction is removed

General observations

- Check there are no hazards due to crushing, shearing, impact and drawing-in.
- Check that the opening and closing speed are not likely to increase the risk of impact
- Check that finger guards are secure and in good repair
- Check the door area does not present tripping or slipping hazards
- Check all doors have correct warning and information signs displayed
- Check the position and security of barriers
- Check operation of any manual or remote activation
- Check for distractions and obstructions in the vicinity of the doors

Mechanical Checks

- With the door on 'Hold Open' setting grasp the front edge of the door and attempt to move it horizontally and vertically. There should be limited movement in the door pivots
- Check all door panels for broken/cracked glass
- Check all equipment and cabling is securely fixed

If you have questions about any of the above items, please contact dormakaba UK Service.

Safety devices for all doors should be checked by an ADSA qualified technician at least once a year.

If you have a problem you cannot correct, turn off the door and call dormakaba on 0800 212 3800.

If you have questions about any of the above items, please contact dormakaba UK Service for assistance.

If you have a problem you cannot correct, turn off the door and call dormakaba on 0800 212 3800.

Regular inspection and maintenance

To be undertaken by a qualified technician.

The following list describes what has to be done during the maintenance of dormakaba door systems. Always consider the mounting and operation instructions during maintenance.

Please observe the requirements for fire doors, emergency exits and escape routes during inspection, if applicable. The current state of technology has to be taken into consideration when assessing the door system with regard to safety-related questions.

Note down any safety-relevant error/deficit in the log book and on the performance sheet. **The inspector must note down the scope, results and date of the inspections and the facility operator has to keep these documents for at least one year.**

ED (swing doors)

1. Check operator for leaks
2. Check arm and adjust/repair/replace as required
3. Check door leaves for smooth running and adjust/repair/replace as required
4. Check and adjust/repair/replace all electrical and hydraulic components as required
5. Check and adjust door coordinator as required
6. Check all safety equipment and adjust/repair/replace as required
7. Check and readjust all safety clearances as required
8. Check all control elements and adjust/repair/replace as required
9. Perform functional test
10. Check wear parts such as slide shoe once a year and replace as required (see complete wear part list)
11. Write down inspection and maintenance report in the log book

Inspection reports

The **facilities operator** should ensure that this log book is available for the qualified technician on his arrival at site. If it is not available then it is the responsibility of the **facilities operator** to record the visit.

Visit date	Work Order / Asset number	Service information / Work carried out	Test report, defects if any and required action	Name Company name (of qualified technician)	Signature

Visit date	Work Order / Asset number	Service information / Work carried out	Test report, defects if any and required action	Name Company name (of qualified technician)	Signature

Visit date	Work Order / Asset number	Service information / Work carried out	Test report, defects if any and required action	Name Company name (of qualified technician)	Signature

Visit date	Work Order / Asset number	Service information / Work carried out	Test report, defects if any and required action	Name Company name (of qualified technician)	Signature

Visit date	Work Order / Asset number	Service information / Work carried out	Test report, defects if any and required action	Name Company name (of qualified technician)	Signature

Visit date	Work Order / Asset number	Service information / Work carried out	Test report, defects if any and required action	Name Company name (of qualified technician)	Signature

CENTRAL LOCATIONS

dormakaba
DORMA UK Ltd
Wilbury Way
Hitchin, Herts
SG4 0AB

dormakaba
Kaba Ltd
Lower Moor Way
Tiverton, Devon
EX16 6SS

SERVICE BRANCHES

SCOTLAND
Unit 1, Almond Road,
Middlefield Industrial Estate,
Falkirk
FK2 9HQ

LONDON NORTH & SOUTH
Wilbury Way
Hitchin
Hertfordshire
SG4 0AB

NORTH EAST
55 Aiden Court
Bede Industrial Estate
Jarrow, Tyne and Wear
NE32 3EF

IRELAND
PO Box 1050
Maynooth
Co. Kildare

MIDLANDS
Unit 7,
Oaks Industrial Estate,
Coalville,
Leicester
LE67 3NQ

SOUTH WEST
Lower Moor Way
Tiverton
Devon
EX16 6SS

NORTH WEST
Unit 10, Meadow
Business Park Meadow
Lane, Bolton
BL2 6PT

dormakaba
Dorma UK Ltd
Wilbury Way
Hitchin
Herts
SG4 0AB
T: 0800 212380
E: service.uk@dormakaba.com
www.dormakaba.co.uk