

Kaba Padlock, CEN 2 2010



Application:


Suitable for universal indoor and outdoor use. High quality padlock for medium to high security applications including remote sites within the utility and infrastructure sectors.

Specification:

- > 58mm brass bodied padlock
- > Nickel plated
- > 9mm diameter open shackle
- > Shackles available in stainless steel or hardened
- > Shackles available with 30 or 50 mm clearance
- > EN12320 Grade 2 (CEN 2)

Included with the cylinder:

- > 2 reversible keys (See "Special Functions and Keys" for key options)
- > Security Card for ownership registration and ordering duplicate keys (where applicable)

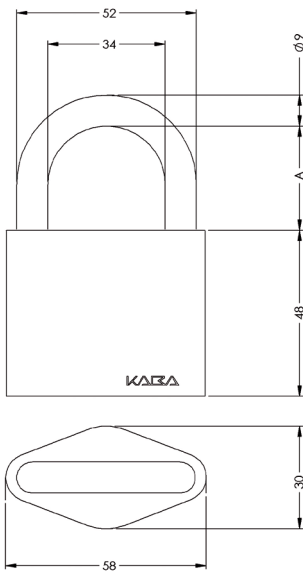

A= 30 or 50 mm

Body length 48 mm
Clear width of shackle 34 mm

Available systems:

- > Kaba 20
- > quattro plus
- > experT

Part number	Clear height of shackle, Dim.	Shackle Material	Shackle Type	Insert
K20100000-NI	30 mm	Hardened steel	Manual Locking	Kaba 20
K20100010-NI	50 mm	Hardened steel	Manual Locking	Kaba 20
K20100020-NI	30 mm	Stainless steel	Manual Locking	Kaba 20
K20100030-NI	50 mm	Stainless steel	Manual Locking	Kaba 20
5-380350-NI	30 mm	Hardened Steel	Manual Locking	experT
5-380340-NI	50 mm	Hardened Steel	Manual Locking	experT
5-380300-NI	30 mm	Stainless Steel	Manual Locking	experT
5-380320-NI	50 mm	Stainless Steel	Manual Locking	experT
7-380340-NI	30 mm	Hardened Steel	Manual Locking	quattro plus
7-380330-NI	50 mm	Hardened Steel	Manual Locking	quattro plus
7-380300-NI	30 mm	Stainless Steel	Manual Locking	quattro plus
7-380320-NI	50 mm	Stainless Steel	Manual Locking	quattro plus