

Gege AP2000

- Burglary resistant to Austrian standard B 5356, EN 1303 and DIN 18252, VdS standard is available on request according to the grade specified
- Fire resistant according to Austrian standard T90
- Optional, certified protection against the bumping (rapido) method
- Paracentric key profile
- Anti-pick and anti-drill protection

Technical Information and Dimensions

The AP2000 is a fully developed and flexible cylinder system, that is mainly used for master key systems or individual cylinders with five tumbler pins.

Anti-picking protection

Anti-picking protection is provided by the paracentric keyway and specially shaped anti-picking mushroom pins.


Anti-drill protection

Special hardened steel pins are installed in the cylinder barrel and cylinder housing to prevent opening by drilling from any angle.


Standard system

- Brass housing
- Gege key bow

- 5 pairs of spring loaded pins
- Cam 9 mm
- Cam positions:
 - for double cylinders = 30°
 - for single cylinders = 45°
 - variable in 8 different positions.
- 3 keys (without security card)
- 2 keys (without security card) for furniture locks and padlocks.

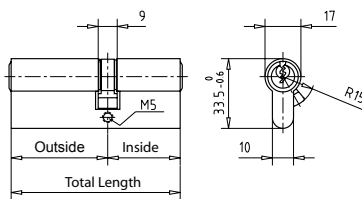

Security double cylinder with 5 pins

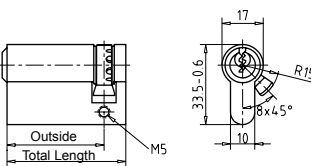

Security single cylinders with 5 pins

Double cylinders with 5 and 6 pins.

Order Code	Outside	Inside	Total
SYST.5DZ27,5+27,5	27,5	27,5	55
SYST.5DZ27,5+30	27,5	30	57,5
SYST.5DZ27,5+35,5	27,5	35,5	63
SYST.5DZ27,5+40	27,5	40	67,5
SYST.5DZ30+30	30	30	60
SYST.6DZ31,5+31,5	31,5	31,5	63
SYST.5DZ30+35,5	30	35,5	65,5
SYST.6DZ31,5+35,5	31,5	35,5	67
SYST.5DZ30+40	30	40	70
SYST.6DZ31,5+40	31,5	40	71,5
SYST.5DZ35,5+35,5 *)	35,5	35,5	71
SYST.5DZ27,5+45	27,5	45	72,5
SYST.5DZ30+45	30	45	75
SYST.6DZ31,5+45	31,5	45	76,5
SYST.5DZ35,5+40 *)	35,5	40	75,5
SYST.5DZ27,5+50	27,5	50	77,5
SYST.5DZ30+50	30	50	80
SYST.6DZ31,5+50	31,5	50	81,5
SYST.5DZ35,5+45 *)	35,5	45	80,5
SYST.5DZ40+40 *)	40	40	80
SYST.5DZ27,5+55	27,5	55	82,5
SYST.5DZ30+55	30	55	85
SYST.6DZ31,5+55	31,5	55	86,5
SYST.5DZ35,5+50 *)	35,5	50	85,5

Order Code	Outside	Inside	Total
SYST.5DZ40+45 *)	40	45	85
SYST.5DZ27,5+60	27,5	60	87,5
SYST.5DZ30+60	30	60	90
SYST.6DZ31,5+60	31,5	60	91,5
SYST.5DZ35,5+55 *)	35,5	55	90,5
SYST.5DZ40+50 *)	40	50	90
SYST.5DZ45+45 *)	45	45	90
SYST.5DZ35,5+60 *)	35,5	60	95,5
SYST.5DZ45+50 *)	45	50	95
SYST.5DZ40+55 *)	40	55	95
SYST.5DZ30+65	30	65	95
SYST.6DZ31,5+65	31,5	65	96,5
SYST.5DZ40+60 *)	40	60	100
SYST.5DZ35,5+65 *)	35,5	65	100,5
SYST.5DZ45+55 *)	45	55	100
SYST.5DZ30+70	30	70	100
SYST.6DZ31,5+70	31,5	70	101,5
SYST.5DZ45+50 *)	45	50	100
SYST.5DZ45+60 *)	45	60	105
SYST.5DZ30+75	30	75	105
SYST.6DZ31,5+75	31,5	75	106,5
SYST.5DZ50+60 *)	50	60	110
SYST.5DZ55+55 *)	55	55	110
SYST.5DZ60+60 *)	60	60	120

Single cylinders

Order Code	Outside	Total
SYST.5HZ30,0	30	39
SYST.6HZ31,5	31,5	40,5
SYST.5HZ35,5 *)	35,5	44,5
SYST.5HZ40,0 *)	40	49
SYST.5HZ45,0 *)	45	54
SYST.5HZ50,0 *)	50	59
SYST.5HZ55,0 *)	55	64
SYST.5HZ60,0 *)	60	69
SYST.5HZ65,0 *)	65	74
SYST.5HZ70,0 *)	70	79
SYST.5HZ75,0 *)	75	84

Thumbturn cylinder

with 5 and 6 pins.
Available in same lengths as double cylinders

Surface finishes	DZ	HZ
natural brass	SYST.5DZ....MS	SYST.5HZ....MS natural
nickel	SYST.5DZ....NIN	SYST.5HZ....NIN
medium brown	SYST.5DZ....BM	SYST.5HZ....BM

*) These Gege security cylinders are also available in 6-pin version (SYST.6...)



„Gege AP2000“, WV EN 09/10
Article number 11609156
Gege is a registered trade mark of the Kaba group.
Technical changes reserved.

