



01 SERIES AUTOMATIC SLIDING DOORS

For versatile door solutions.

THE ULTIMATE AUTOMATIC OPERATOR

For over four decades DORMA has been manufacturing and supplying the highest quality automatic door operator throughout Australia, South East Asia, the Middle East and New Zealand.

DORMA's tradition of superior reliability, longevity, performance and safety continues to influence its product development to supply durable cost effective operators with lower life cycle costs.

Using next generation technology and powered by DORMA's 01 series high torque motor-gearbox offering superior performance, the 01 Series motor drive can operate door weights up to 1000kg. This impressive automatic sliding door operator is extremely versatile to suit the largest of door applications and architectural creativity.

The elegant design profile combined with intelligent door automation provides the perfect solution for sophisticated architectural concepts and DORMA's commitment to quality and product longevity ensures that you are investing for the future.

Profile Options

- Single Slide/Bi-Parting 265mm H x 152mm W
- 165mm H x 232mm W
- Telescopic 266mm H x 245mm W

The DORMA 01 Series is Australian made specifically designed for high usage, certified to 1,000,000 cycles. The motor/gearbox/lock is supported by a 10 year warranty when serviced by an authorised representative in accordance with AS5007.

The in-built UPS (**Uninterrupted Power Supply**) provides full emergency operation under loss of mains power to ensure that safe egress is maintained, and when fitted, electric security locking remains fully operational for when you need it most.

The 01 Series EL Secure electric motor lock is one of a few to be approved for 'Secure Area Applications' by the Australian Government through the **Security Construction Equipment Committee (SCEC)**.

When longevity, security and 24 hour on call service and response are paramount, you can rely on DORMA. This is why DORMA is the trusted name and clear market choice.

Compliance

The DORMA 01 Series fully complies with the latest Australian and New Zealand industry standards and codes including the National Construction Code (NCC), and is compliant with Australian Standard AS5007 "Powered doors for pedestrian access and egress" independently certified by a NATA accredited laboratory.

Accessories/Options

The DORMA 01 series is available as a chain or heavy duty belt drive and can be interfaced to an extensive range of door control and program switches, push buttons, presence/safety sensors, P-E safety beams and a wide choice of signage plates including Braille.



HOSPITALS & HEALTHCARE



HOTELS & CONVENTION CENTRES



FINANCIAL INSTITUTES



GOVERNMENT BUILDINGS



SHOPPING CENTRES



CORRECTIONAL FACILITIES



LAW ENFORCEMENT BUILDINGS



AIRPORT & TRANSPORT HUBS

ENGINEERED FOR STRENGTH

The DORMA EL Secure electric motor lock is arguably one of the most secure and versatile locks on the market, The 01 series operator is one of only a few to be approved for 'Secure Area Applications' by the Australian Government through the **Security Construction Equipment Committee (SCEC)**.



Motor Lock

When the motor lock function is selected the door will fully close and lock at normal operating speed when all the safety devices are clear. If the door is obstructed while closing it will auto reverse to the fully open position, dwell time out, close and lock.

Smart Lock

When smart lock is selected the door will close and lock at normal speed overriding all safety devices. If the door is obstructed during the closing cycle it will immediately lock in position for a preset time before closing and re-locking.

Emergency Lock

When the emergency lock function is selected the door will close and lock at its maximum operating speed, overriding all the safety devices. If the door is obstructed during the closing cycle it will immediately lock in this position for a preset time before unlocking and fully closing and re-locking.

Partial Open Lock

When the partial open lock function is selected the door will open to a preset distance and lock in this position. A secure transaction can be achieved and when completed the door will fully close and re-lock.

1 Direct drive gearbox incorporating high tensile steel cut gears


- Fully enclosed 8:1 gear ratio
- Chain drive with 1950kg tensile strength
- Hardened steel gears
- Sealed for life bearings

2 3 phase 24V high torque motor capable of moving up to 1000 kg

- Purpose designed
- Solid construction
- Maintenance free

3 Fully integrated, tamper resistant electric lock enabling the door to be locked in any position

- SCEC approved
- Smart lock
- Partial open lock
- Emergency lock

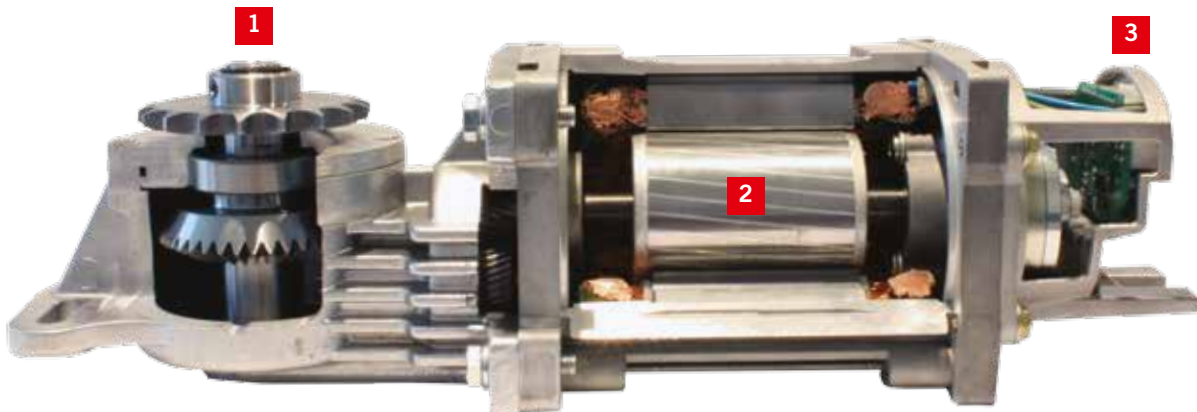

Heavy Duty Purpose Designed and Built Motor and Electric Motor Lock

Powered from a standard 240VAC GPO, the 01 Series utilises a purpose designed 3 Phase 24V AC motor and a fully enclosed secure motor lock that is totally resistant to vandalism and the effects of extreme weather conditions.

Features and benefits:-

- Doors can be locked in any position, through the electric lock engagement.
- High speed emergency close & lock option.
- Fully enclosed (tamper proof) lock and digital encoder.
- Partial Open Lock - a reduced opening

distance that allows secure transactions.

- Constant power at all times during heavy traffic flows – performance guaranteed.
- Engineered to operate door weights in excess of 300kgs.

- The motor/gearbox/lock are covered by a 10 year warranty when serviced by a DORMA representative in accordance with AS5007.
- Endurance tested and NATA accredited to 1,000,000 cycles.

01 SERIES OPERATOR MODELS



EL 301

- Powerful 24VAC high torque motor capable of operating a total door weight capacity of 300kg
- Designed to suit aluminium framed, 12 / 15mm thick frameless glass, solid core timber or custom type doors
- Robust and reliable chain drive power train with a tensile strength of up to 1950kg
- UPS feature built in providing up to 300 continuous open / close cycles during a power failure
- AS5007 NATA accredited
- Tested and certified to 1,000,000 cycles



EL 301 Secure - Motor Gearbox/ Lock

- SCEC approved for secure area applications
- Fully integrated electronic lock system enclosed in a solid tamper resistant housing
- Security program functions include: lock, smart lock, partial open lock and emergency lock
- Up to 48 hours of continuous lock time during a power failure with an option to extend
- Door leaves can be locked in any position (A/HR's parcel transfer)
- BMS interface including open, closed, power, battery, monitoring
- Customer approach alarms



EL 301 Telescopic - Framed Door

- As per EL 301 features
- Greater flexibility when a wider clear opening is required but the available space is limited
- Available for use in both bi-parting telescopic (4 door leaves and single sliding telescopic (2 door leaves in one direction) applications
- Up to 3 partial open distances available
- Automatic or manual partial open available



EL 301 Telescopic - Frameless Glass Door

- As per EL 301 features
- Frameless glass doors provide a clear view and when in the fully open position door leaves sit flush with the fixed panel
- Greater flexibility when a wider clear opening is required but the available space is limited
- Available for use in both bi-parting telescopic (4 door leaves) and single telescopic sliding (2 door leaves in one direction) applications.
- Automatic or manual partial open available
- Up to 3 partial open distances available
- Mode dependant on partial open function



EL 301 Breakout - Framed Door

- As per EL 301 features (except door weight)
- Operates as a automatic sliding door system under normal operation
- The emergency breakout/escape function is actioned by applying outward pressure to the door leaf and/or side panel which deactivates the automatic function to allow maximum unimpeded egress
- Sliding door operator with emergency breakout capability (maximum required egress width)
- Standard door weight 240kg
- AS5007 NATA accredited



EL 301 Breakout - Frameless Glass Door

- As per EL 301 features (except door weight)
- Operates as a automatic sliding door system under normal operation
- The emergency breakout/escape function is actioned by applying outward pressure to the door leaf and/or side panel which deactivates the automatic function to allow maximum unimpeded egress
- Frameless sliding door operator with emergency breakout capability (maximum required egress width)
- Standard door weight 200kg
- AS5007 NATA accredited

01 SERIES OPERATOR MODELS



AL 401

- Powerful 3 phase 24 VAC high torque motor
- Door weight capacity 400kg
- Stainless steel track system
- Designed to suit aluminium framed and 12mm, 15mm, 19mm thick frameless glass, solid core timber or custom type doors
- AS5007 NATA accredited
- Tested and certified to 1,000,000 cycles
- Solid 12:1 ratio gearbox with steel cut gears



AL 501

- Powerful 3 phase 24 VAC high torque motor, coupled with 12:1 ratio gearbox
- Door weight capacity up to 500kg
- Solid aluminium J-track system
- Designed to suit aluminium framed 12mm, 15mm, 19mm, 25mm thick frameless glass, solid core timber or custom type doors
- AS5007 NATA accredited
- Tested and certified to 1,000,000 cycles
- Solid 12:1 ratio gearbox with steel cut gears



AL 1001

- Powerful 3 phase 24 VAC high torque motor, coupled with 12:1 ratio gearbox
- Door weight capacity 1000kg
- Solid steel track system ensures smooth operation and long term reliability
- To suit door widths up to 3000mm
- Solid 12:1 ratio gearbox with steel cut gears
- Applications include hospital lead lined doors, large wall dividers and industrial doors

01 SERIES PERFORMANCE TABLE

Door Parameters	EL 301	AL 401	AL 501	AL 1001
Single panel sliding door				
– Maximum Door width	3000mm	3000mm	3000mm	3000mm
– Maximum Door weight	300kg	400kg	500kg	1000kg
Double leaf sliding door				
– Maximum Door width	1500mm*	2000mm*	2000mm*	2000mm
– Maximum Door weight	150kg	200kg	250kg	500kg
Technical Data				
Height (Cowl)	240mm	240mm	240mm	420mm
Depth	152mm	152mm	152mm	152mm
Track Type	Aluminium	Stainless Steel	Solid Aluminium	Solid Steel
Gearbox				
Purpose designed fully enclosed with steel cut gears	●	●	●	●
Drive Train				
High Torque Motor 24V 3 Phase	●	●	●	●
Chain	●	●	●	●
Belt	○	○	○	○
Opening speed (Fully adjustable)	10 – 50cm/sec	10 – 50cm/sec	10 – 30cm/sec	10 – 30cm/sec
Closing speed (Fully adjustable)	10 – 40cm/sec	10 – 40cm/sec	10 – 30cm/sec	10 – 30cm/sec
Hold open time (Independent for Lock and Auto mode)	0 – 60 sec	0 – 60 sec	0 – 60 sec	0 – 60 sec
Power Supply	240 V, 50/60Hz	240 V, 50/60Hz	240 V, 50/60Hz	240 V, 50/60Hz
Power Consumption	175W	175W	175W	175W
Ambient Temperature	-15°C to 50°C	-15°C to 50°C	-15°C to 50°C	-15°C to 50°C
Class of protection (IP Rating)	IP20	IP20	IP20	IP20
Control Module				
Function Modes				
– Off/Lock	●	●	●	●
– Exit	●	●	●	●
– Automatic	●	●	●	●
– Open	●	●	●	●
Electronic Mode Pad	○	○	○	○
Security Interface (Mode Control & Activation)	○	○	○	○
After Hours Exit (Night bank)	●	●	●	●
Self Learn Function	●	●	●	●
Automatic reverse on obstruction	●	●	●	●
Photo electric cells (Safety beams)	●	●	●	●
Failsafe Opening	●	●	●	●
Continuous operation under power failure (UPS)	●	●	●	●
12 VDC output	●	●	●	●
Door Management System (DMS)	○	○	○	○
Customer Approach Alarms (Lock/PE/Auto)	○	○	○	○
Locking				
Electric Motor lock (Fully enclosed/tamper resistant)	○	○	○	○
Lock Functions - Smart/Emergency/Pharmacy	○	○	○	○
Door Lock in any position	○	○	○	○
Standard ● Optional ○				

*larger door sizes upon request

GENERAL SPECIFICATION TEXT



The Automatic Door Operator

The Automatic single slide/bi-parting door operator is to be a 240-volt fully electric DORMA 301/401/501 SERIES. Fully housed in extruded aluminium (height 265mm x width 152mm). Fully complies with the relevant Australian Standards for Automatic Door operators. A NATA test and verification of compliance certificate to AS5007 section 4.6 is to be supplied prior to tendering.

The equipment will incorporate the following:

A 3 phase 24 volt motor that is unable to be burnt out; a programmable logic control with current sensing and durable solid state switching of the motor; chain drive with average tensile strength of 1950kg and a 12.7mm pitch; self-lubricating gearbox with steel cut gears (not nylon or cast) for increased durability with no intermediate belts or pulleys; an anodised aluminium replaceable tracking system; and a carriage assembly supported by glass fiber reinforced nylon track wheels with fully raced and sealed ball bearings.

The operator must have positive electric braking to close the doors smoothly; fully adjustable speed control with independent settings for open, close and braking; automatic re-closing circuitry to ensure doors re-close if partially opened; intermediate selectable opening widths or climate control facility.

The operator is to incorporate a failsafe device to open doors fully on power failure or on fire signal in accordance with the NCC section D2.19 and relevant Australian Standards; monitoring warning signal to indicate when the battery power is low; automatic reversing if obstructed during closing sequence with fully adjustable sensitivity settings; automatic stop and retry if obstructed during opening sequence at a predetermined programmable time and speed; dual sets of jamb fitting high gain (up to 15m) flush mounted safety beams (PE cells) that are resistant to sunlight.

Actuation

The operator is to be actuated by two DORMA microwave movement sensors as standard equipment; the sensors must be resistant against reflected sun light and have focusable area detection settings to reduce unnecessary actuations.

The operator is to be covered by a two (2) years parts and twelve (12) months labour warranty from date of invoice.

Optional Features

Belt Drive

15mm belt with curvilinear tooth design precisely formed and accurately spaced to ensure smooth engagement with pulley grooves.

Motor Lock

The operator is to have a failsafe electric motor lock, compliant with the NCC section D2.19 and D2.21, which locks the doors via the drive train regardless of the door position. It is to incorporate a rechargeable battery reserve to ensure the doors remain locked for up to 48 hours under mains power failure with an option to extend.

Advanced Security Interface Board

Provides operational data output signals for building security system, i.e. open, closed, locked (refer to page 11)

Mode Pad

The operator is to be fitted with a DORMA one touch operation electronic mode pad with back lit LCD screen. The mode pad is to have an input jack for the operator programming device and integrated diagnostic feedback function that provides information on door function status and servicing requirements.

OPERATOR SPECIFICATION TEXT

EL 301 Single/Bi-parting/Telescopic Automatic Door Operator:

The automatic framed/frameless/SCD door operator to suit a single/double/four panel sliding door is to be a 240v fully electric DORMA EL 301 Secure Series. Fully housed in extruded aluminium, the

operator is to include a tamper proof fully enclosed electric lock capable of locking the door leaves in any position. The operator must include a monitored battery back up system with audible

alarm and be able to provide up to 48 hours of lock function during a power failure. The operator is to comply with the Australian Standard AS5007.

EL 301 Breakout - Frameless Glass Door Automatic Door Operator:

The automatic single / bi-parting, door operator is to be a 240v fully electric DORMA EL 301 Frameless Breakout Series, fully housed in extruded aluminium (265 mm H x 152 mm W). The operator must be capable of

operating a total door weight up to 200 kg and in emergency be able to opened fully including the sidelights by applying an outward pressure. It is to include a monitored battery back up system with audible alarm that is able to operate the

door up to 300 cycles during a power failure. The operator is to comply with the Australian Standard AS5007 and the Building Code of Australia.

EL 301 Breakout - Framed Door the Automatic Door Operator:

The automatic single / bi-parting, door operator is to be a 240v fully electric DORMA EL 301 Framed Breakout Series, fully housed in extruded aluminium (265 mm H x 152 mm W). The operator must be capable of

operating a total door weight up to 240kg and in emergency be able to opened fully including the sidelights by applying an outward pressure. It is to include a monitored battery back up system with audible

alarm that is able to operate the door up to 300 cycles during a power failure. The operator is to comply with the Australian Standard AS5007 and the Building Code of Australia.

AL 401 Automatic Door Operator:

The automatic single / bi-parting door operator is to be a 240v fully electric DORMA AL 401 Series, fully housed in extruded aluminium (265mmH x 152mmW) including a stainless steel

track system. The operator must be capable of operating a total door weight up to 400 kg and include a monitored battery back up system with audible alarm that is able to operate the door up

to 300 cycles during a power failure. The operator is to comply with the Australian Standard AS5007 and the Building Code of Australia.

AL 501 Automatic Door Operator:

The automatic single / bi-parting door operator is to be a 240v fully electric DORMA AL 501 Series, fully housed in extruded aluminium (265mmH x 152mmW) including a solid aluminium

track system. The operator must be capable of operating a total door weight up to 500 kg and include a monitored battery back up system with audible alarm that is able to operate the door up

to 100 cycles during a power failure. The operator is to comply with the Australian Standard AS5007 and the Building Code of Australia.

AL 1001 Automatic Door Operator:

The automatic single / bi-parting door operator is to be a 240v fully electric DORMA AL 1001 Series, fully housed in extruded aluminium (420mm H x 152mm W) including a solid steel track

system. The operator must be capable of operating a total door weight up to 1000 kg and include a monitored battery back up system with audible alarm that is able to operate the door up to 100 cycles

during a power failure. The operator is to comply with the Australian Standard AS5007 and the Building Code of Australia.

OPTIONS

Motion Sensor



- Adjustable field detection W4500 x D2000mm
- Flexible mounting options
- Rain cover option
- Operating voltage 12/24 V AC/DC

Part No. A86002000

Pushbutton



- Palm activated rocker button
- Stainless Steel finish
- Dimension H80mm x W80mm

Part No. D19143201170 - H/CAP
Part No. D19143001170 - Finish SSS


Motion/Presence Sensor



- Dual motion/presence sensor
- Presence safety curtain 2mt wide x 0.20mt deep
- Motion field 4m wide x 2m deep

Part No. A86712400

PK Series Security Key Switches



- Solid construction prestige keyswitch
- Security concealed fixing points. Suitable for most master key systems
- PK2 - Spring return switch
- PK4 - Four position switch

PK4 Part No. A81009004 PK2 Part No. A81009002

Presence Sensor



- Presence sensor
- Presence safety curtain 2mt wide x 0.20mt deep

Part No. A86302100


Remote Mode Switch



- Stylish design
- Wireless
- Lock/Open/Auto/Hold function
- 50m operating distance

Part No. A10120240


Push to open plate



- Suitable for parent room door application
- Compliant to National Construction Codes (NCC)
- Durable and robust design including braille and raised lettering


Part No. A10109035

Privacy Door System



- Suitable for disabled toilet door applications
- Compliant to National Construction Codes (NCC)
- Durable and robust design including braille and raised lettering
- Bell output, duress and staff over-ride function

Touchless Switch



- Wall or surface mount
- Suitable for hospitals, clean room and food preparation
- Dimensions H85mm x W85mm

Part No. B12010039

Mode Pad Switch LCD Display



- Security pin-coded
- Simple one-touch mode selection
- Diagnostic feedback
- Customer warning alarms
- Partial opening settings
- Pharmacy lock control

Part No. A10110016B

BUILDING MANAGEMENT

Advanced Security Interface Board:

- Flexible interface between door operator and security/BMS
- Outputs include: locked, closed, 240V fail, battery condition, people count etc.
- Inputs include: security interface to open, lock, emergency lock, partial open lock, safety stop etc.

Door Management System:


- System integration via building LAN (local area network)
- Up to 10 door operators can be controlled and monitored
- Remote control operation from a stand alone PC
- Provides real time diagnostic feedback
- Mode control via built in time clock

SERVICE AND MAINTENANCE

When you choose DORMA, you are supported by a nationwide network of accredited and fully trained, specialist automatic door technicians and agents, 24 hours a day, 7 days a week.

Our specialised service covers DORMA's comprehensive range of door operators, door closers, industrial doors and movable walls with our expertise extending to all models.

When you call DORMA Service you will speak to someone who knows the products and who can offer expert advice. Public safety and security are our paramount concern and this is reflected in our prompt response times - making DORMA the unrivalled industry leader in service support.

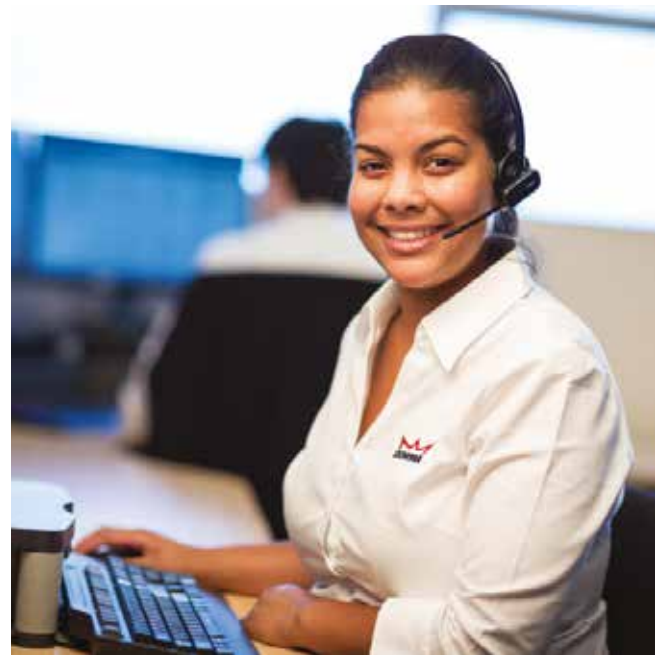

DORMA Service – at work in your locality.

With our comprehensive maintenance and repair service, DORMA ensures the functional integrity, safety and security of door systems for extended longevity.

DORMA Service 24/7

Australia Ph: 1800 675 411

New Zealand Ph: 0800 436 762





DORMA Australia
Head Office
46-52 Abbott Road
HALLAM
Victoria 3803
Phone 1800 675 411
info.au@dorma.com
www.dorma.com

DORMA NZ Limited
Head Office
Building P
61-69 Patiki Road
AVONDALE
Auckland 1026
Phone 0800 436 762
info.nz@dorma.com

