

ED22M**PRODUCT FACTSHEET**

ED22M - Exit Device

The Kaba ED22M has been designed to operate in conjunction with the renowned Kaba MS2 mortice lock.

The ED22M offers all the security functions of the MS2 mortice lock whilst providing a fast and convenient means of escape in the case of an emergency. The exit device is supplied with convenient mounting plates, providing fast, secure and easy thru fixing to timber doors.

Incorporating the MS2 also offers the benefit of providing external door trim options reserved for the MS mortice, for example, plate furniture, pull handles and the like.

PRODUCT SPECIFICATION

The ED22M is supplied complete with ED22 exit device and MS2ED (modified for double doors) mortice lock.

Length

Supplied in 1060mm standard length. Can be field sized to 645mm minimum length.

Mounting

- > **Timber** - Mounting plates and thru fixing screws (supplied).
- > **Metal/Aluminium** - Fixing direct to metal surface less mount plates (fixings not included). Drill and tap recommended.

Stile

115mm to suit metal/aluminium where mounting plates are not used. A mid rail is required if mounting plates are fitted or if the door opening is greater than 1050mm.

Door Thickness

35mm up to 50mm thick door as standard. Thicker doors on application.

Fixings

Supplied as standard with fixings for surface & thru fixing (surface fixings supplied as self-tapping timber screws).

Dogging

Hex (Allen) key type supplied as standard. Cylinder dogging by external hold back cylinder.

Note: Fire doors cannot include dogging due to fire regulations.

Handing

Reversible

Finish

Satin Stainless Steel (SSS)

Fire rated

A fire rated version of the ED22M (ED22MF) is available.

This version comes without the dogging function.


The ED22MF has been successfully tested on fire door assemblies in accordance with Australian Standard AS1905 Part 1: Fire door sets.

FIRE RATED

When specifying/ordering add suffix **"F"** to code, eg. ED22MFSSS.

Note: Fire doors cannot include dogging due to fire regulations.

OPTIONAL EXTERNAL TRIMS

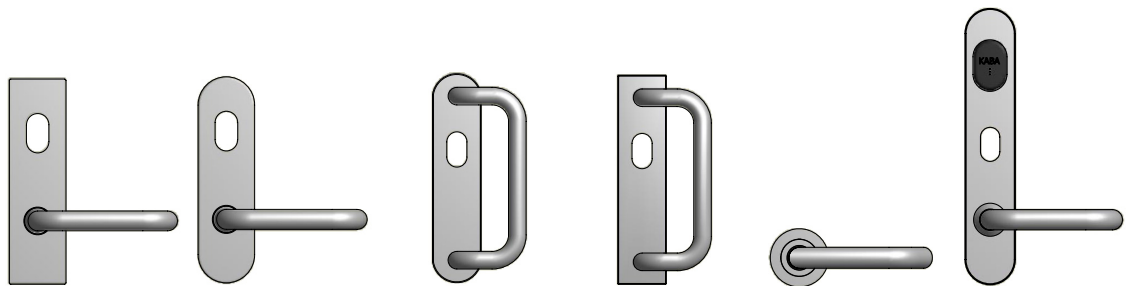

	600 SERIES	100 SERIES	WAFE	TAFE	LEVERHANDLES	C LEVER
NIGHTLATCH	604	104	-	-	FA270/FA280	Refer to C Lever options
STOREROOM	601F	101F	WAFE03	TAFE03	240F/270F/ 280F/740F + FA270/280	
CLASSROOM	601	101	-	-	240/270/ 280/740 + FA270/280	

PRODUCT CODE	FINISH	DESCRIPTION
ED22MSSS	SSS	ED22M - Exit Only Mortice Lock - 1060mm SSS
ED22MFSSS	SSS	ED22M - Exit Only Mortice Lock (Fire rated) - 1060mm SSS